



# SPREADERS






# LOAD 'EM UP

THIS IS WHERE THE REAL MONEY IS MADE

Fisher Engineering — the name trusted for industry-leading snow plows since 1948 — offers a full line of advanced technology spreaders, **loaded with standard features and built for a long life of reliable performance.** While hard-working men and women are out there taming the storms and helping keep communities safe, it's nice to know that FISHER® hopper and tailgate spreaders are helping clear the way.

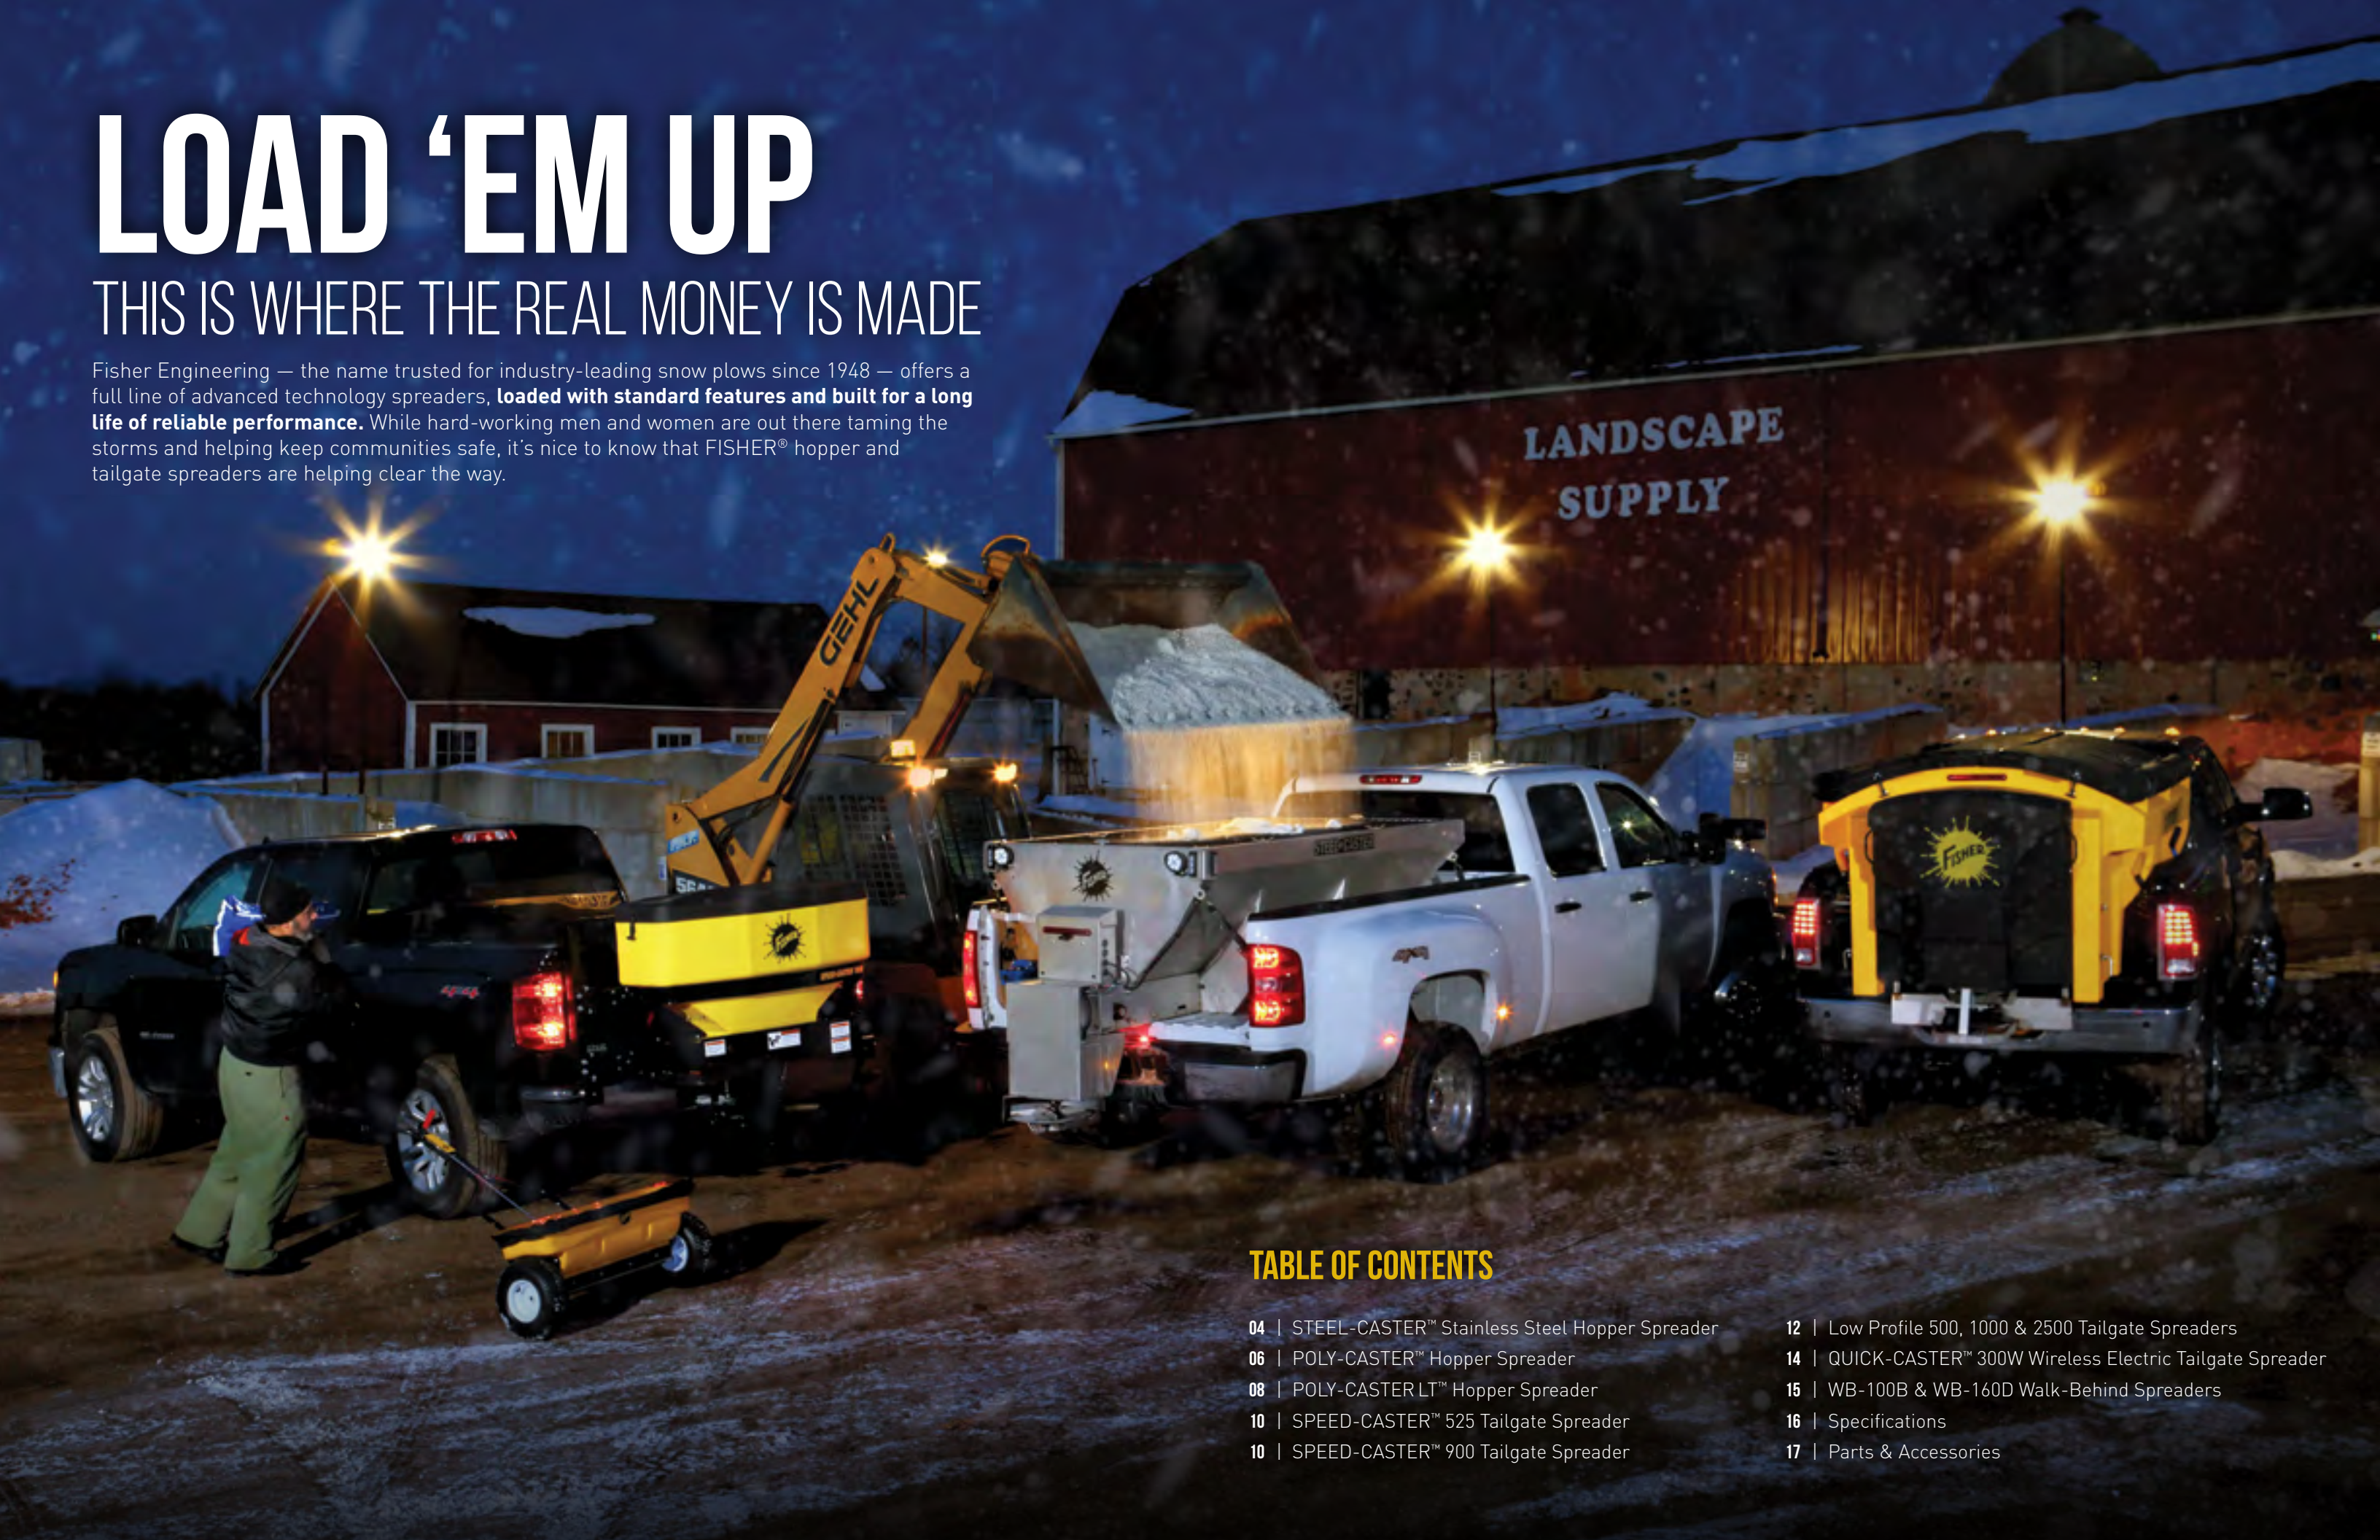

## TABLE OF CONTENTS

- 04 | STEEL-CASTER™ Stainless Steel Hopper Spreader
- 06 | POLY-CASTER™ Hopper Spreader
- 08 | POLY-CASTER LT™ Hopper Spreader
- 10 | SPEED-CASTER™ 525 Tailgate Spreader
- 10 | SPEED-CASTER™ 900 Tailgate Spreader

- 12 | Low Profile 500, 1000 & 2500 Tailgate Spreaders
- 14 | QUICK-CASTER™ 300W Wireless Electric Tailgate Spreader
- 15 | WB-100B & WB-160D Walk-Behind Spreaders
- 16 | Specifications
- 17 | Parts & Accessories




# STEEL-CASTER™

## WHEN IT'S TIME TO ROCK, BRING THE HEAVY METAL

With **SIX sizes to choose from**, there's a FISHER® STEEL-CASTER™ Stainless Steel hopper spreader that's perfect for any pickup, dump body or flatbed truck. Engineered for efficiency and designed for durability, these spreaders feature the latest advancements in technology with more standard features built into every model for unbeatable value. And because it's FISHER, count on it to deliver years of heavy-duty reliable service.

AVAILABLE IN 6 SIZES FROM 7' 1.5 CU YD TO 10' 6.0 CU YD

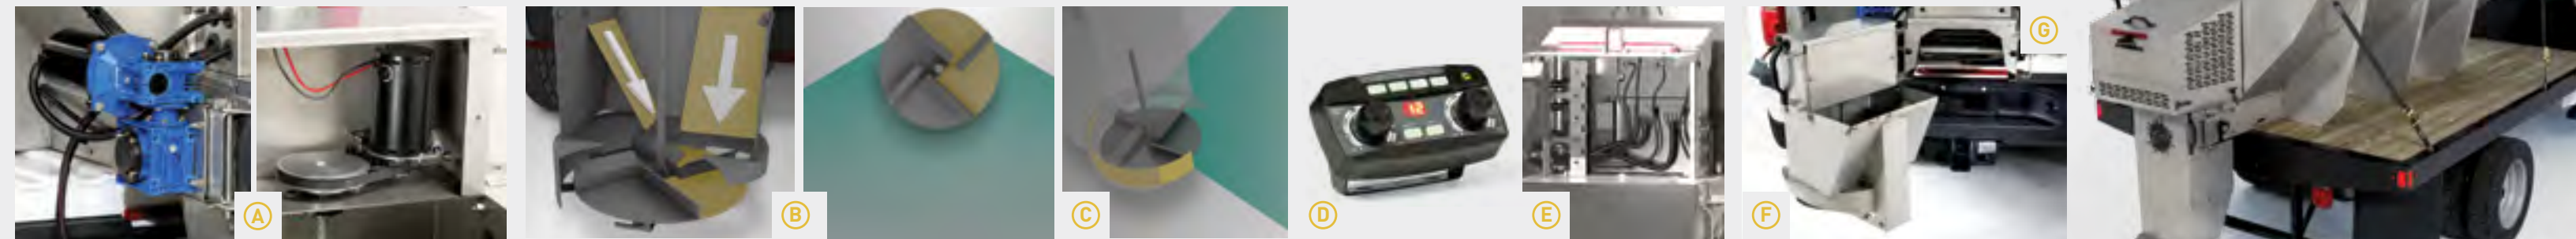

### A DUAL ELECTRIC MOTORS

Two instant-start, 12-volt electric motors provide quiet, reliable and independent control over the conveyor and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion. Gas and hydraulic options also available.

### B INNOVATIVE CHUTE DESIGN

Reduce material waste with this innovative chute design that delivers material to the precise points on the spinner that cast it out and away from the truck, instead of back on your bumper.

### C CIRCULAR SHUTTER DEFLECTOR

Maximize material control with the easy-to-adjust shutter deflector that allows one-side spreading operation, preventing materials from going where they aren't intended to go.

### D VARIABLE SPEED CONTROL\*

Enhanced dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. Four standard accessory buttons and a dedicated blast button provide optimum in-cab efficiency. Easy-to-understand, digital self-diagnostics alert the operator when the hopper is empty or when adjustments are needed, and LEDs make the control easy to read. Its compact size compared to traditional controls fits easily into today's modern truck cab designs.

### E ACCESSORY HUB\*

Conveniently connect accessories directly into the hub mounted in the back of the hopper, without having to run additional wires to the front of the truck.

### F DUAL SWING CHUTE DESIGN

The dual swing chute design opens from either side to provide easy access for maintenance or material unloading. Two dump buttons\*, conveniently located at the back of the hopper, run the conveyor for easy clean out.

### G CONVEYOR

One of the widest in the industry, the 16½" conveyor moves more material consistently and smoothly to help reduce bridging.

### + SIX SIZE OPTIONS WITH STANDARD FEATURES

7' 1.5 cu yd | 8' 2.0 cu yd | 9' 3.0 cu yd  
9' 4.5 cu yd | 10' 4.5 cu yd | 10' 6.0 cu yd

All come standard with a Top Screen Kit, Inverted V, Tie-Down Ratchet Straps, Adjustable Chute\*\*, Rear Dump Buttons\*, Rear Work Light Button\*

### + OPTIONAL ACCESSORIES

License Plate Kit | Work Light Kit | Strobe Light | Vibrator Kit | Tie-Down Chain Kit | 6" Side Extensions






# POLY-CASTER™

# WE'VE GOT THIS COVERED

With one-piece double-wall poly hopper construction, and the ability to independently control material delivery and spread pattern, the FISHER® POLY-CASTER™ hopper spreaders offer precise control to get the job done right. Whether spreading ice melt in a large lot, or taking the glaze off long residential driveways, count on this spreader to deliver years of reliable low-maintenance performance.

AVAILABLE IN 3 SIZES FROM 7' 1.5 CU YD TO 8' 2.5 CU YD

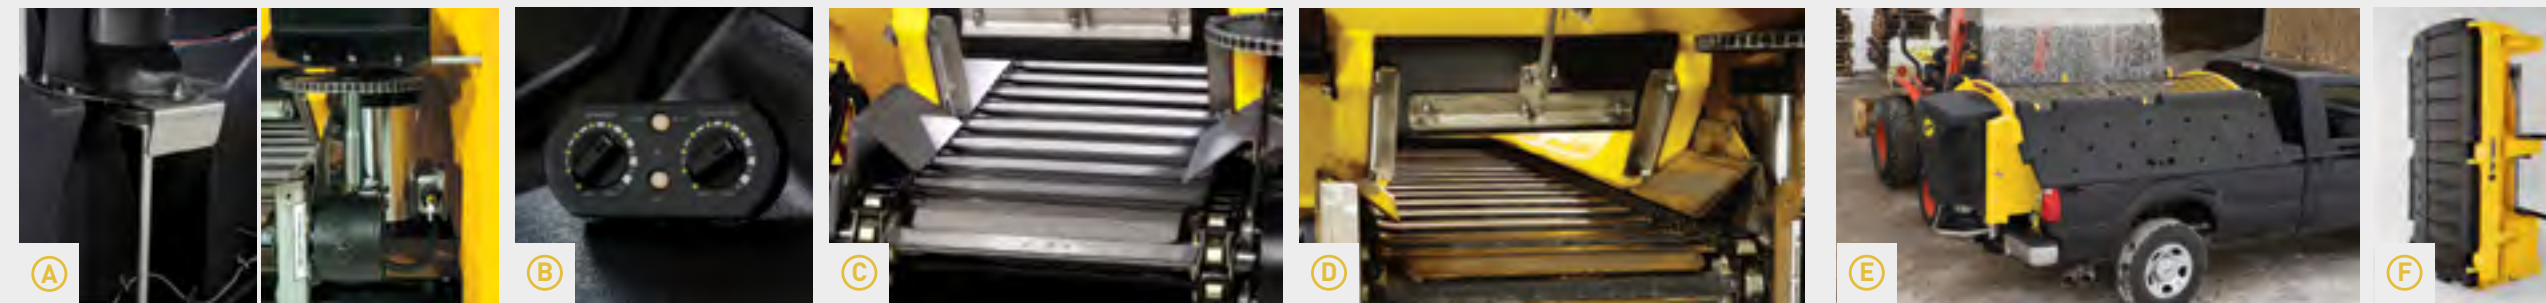

Flatbed truck shown with Adjustable Drop Chute

## (A) DUAL ELECTRIC MOTORS

Two instant-start, 12-volt electric motors provide quiet, reliable and independent control over the conveyor and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion.

## (B) VARIABLE SPEED CONTROL

Dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions, and a dedicated blast button lets you put down more material quickly when needed. Self-diagnostics alert the operator when the hopper is empty or adjustments are needed.

## (C) CONVEYOR

One of the widest in the industry, the 16½" conveyor moves more material consistently and smoothly to help reduce bridging. The corrosion-resistant stainless steel conveyor housing provides added strength and rigidity.

## (D) ADJUSTABLE FEED GATE

An adjustable feed gate helps meter material flow to the discharge chute for enhanced control.

## (E) TWO-PIECE POLY HOPPER COVER

The overlapping poly hopper covers shield de-icing material from the elements. Its overlapping design seals out moisture while molded water grooves direct runoff away from hopper. Its domed shape increases hopper capacity. In the open position, the covers protect the truck from material overflow while loading.

## (F) EASILY REMOVABLE

The POLY-CASTER hopper spreader can be removed from the truck easily and the entire unit stands on end to minimize the space needed for storage.

## + THREE SIZE OPTIONS WITH STANDARD FEATURES

Choose from 3 sizes:  
7' 1.5 cu yd | 8' 1.8 cu yd | 8' 2.5 cu yd  
All come standard with a Top Screen Kit, Center High-Mounted Stop Light, Built-In Tie-Down Loops

## + OPTIONAL ACCESSORIES

Inverted V Kit | Vibrator Kit  
Work Light Kit | License Plate Kit








# POLY-CASTER LT™

# THE RIGHT SIZE FOR THE JOB

When it's time to finish up smaller areas, the FISHER® POLY-CASTER LT™ 0.5 cubic yard spreader steps up to the plate. The POLY-CASTER LT spreader provides professional performance in a compact package that's perfect for smaller area ice control needs, whether in the bed of a pickup truck or the back of a UTV.

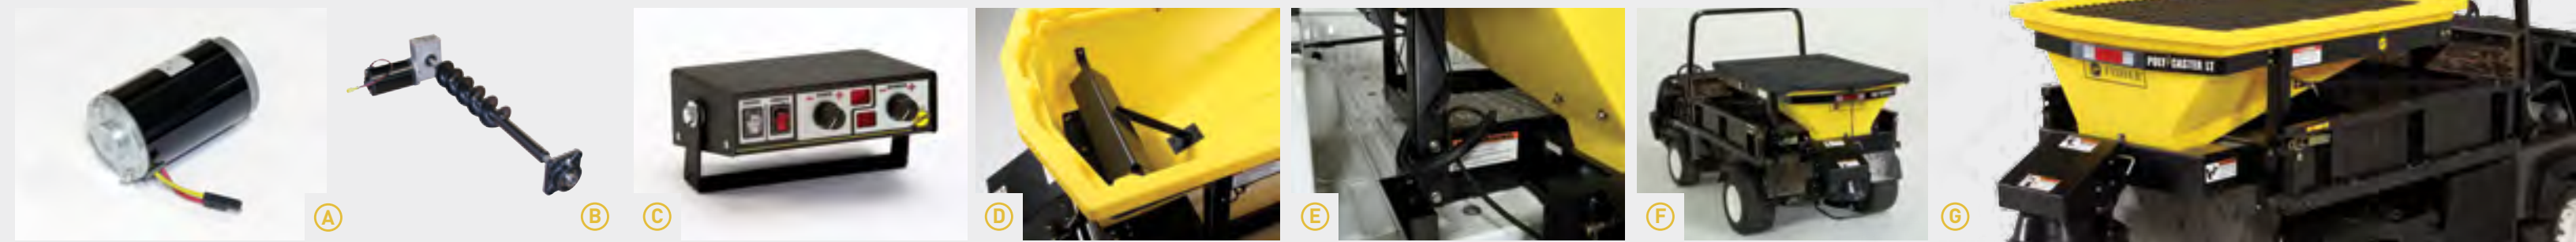

**A) DUAL ELECTRIC MOTORS**  
Two instant-start, 12-volt electric motors provide quiet, reliable, independent control over the auger and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion.

**B) TRANSVERSE AUGER DELIVERY SYSTEM**  
When an obstruction occurs, the transverse auger delivery system can reduce downtime by automatically backing itself in and out until the obstruction is cleared or a required adjustment has been made.

**C) VARIABLE SPEED CONTROL**  
Dual variable-speed control allows you to independently control material delivery and spinner speed to precisely match spread pattern to conditions.

**D) VIBRATING INVERTED V**  
A standard 12-volt vibrator is directly connected to the inverted V, providing maximum agitation to help break up large clumps and ensure the smooth flow of material.

**E) BOLT DOWN BED MOUNT**  
A positive-lock, bolt-down bed mount provides secure installation.

**F) FITTED TARP COVER**  
A fitted tarp cover helps ice control material stay dry to prevent clumping.

**G) STANDARD TOP SCREEN**  
The standard top screen helps break up large chunks of de-icing material during the loading process to help prevent clogging and bridging during operation.

**+ OPTIONAL ACCESSORIES**  
Hold Down Kit | Material Control Tube Optimum Flow Kit







**SPEED»CASTER™**

# THE RIGHT MATERIAL IN THE RIGHT PLACE

**The Right Material in the Right Place.** FISHER® SPEED-CASTER™ 525 and SPEED-CASTER™ 900 tailgate spreaders are designed to give you the ultimate ice control versatility. Each features a 2-stage, auger-fed delivery system that spreads bagged or bulk sand, salt or a sand/salt mix with precise control. With a mounting system that accommodates pickups, SUVs and tractors, these FISHER tailgate spreaders deliver exceptional performance in virtually any application.



**(A) VARIABLE SPEED CONTROL**

Enhanced dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. Three standard accessory buttons and a dedicated blast button provide optimum in-cab efficiency. Easy-to-understand, digital self-diagnostics alert the operator when the hopper is empty or when adjustments are needed, and LEDs make the control easy to read. Its compact size compared to traditional controls fits easily into today's modern truck cab designs.

**(B) TOP SCREEN AND LID**

The steel rod top screen breaks up chunks of de-icing material while loading for improved performance, and a molded polyethylene lid protects the material from the elements.

**(C) DUAL ELECTRIC MOTORS**

Two instant-start, 12-volt electric motors provide quiet, reliable, independent control over the auger and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion.

**(D) AUGER**

The heavy-duty horizontal auger is built of solid powder coated steel for long-lasting strength and performance.

**(E) SPINNER ASSEMBLY**

The SPEED-CASTER 525 spreader features a 10" spinner made of nylon/glass reinforced resin, and the SPEED-CASTER 900 spreader features a 12" steel spinner for a long, low-maintenance life.

**(F) VIBRATING INVERTED V**

A standard vibrating inverted V breaks up clumps to ensure the smooth flow of materials.

**+ SPEED»CASTER™ 525**

The SPEED-CASTER 525 spreader features a 5.25 cu ft hopper that holds up to 420 lb of bagged or bulk de-icing material. Standard with combination 2" Receiver Hitch and 3-point hitch mount.

**+ SPEED»CASTER™ 900**

The SPEED-CASTER 900 spreader includes a 9.0 cu ft hopper for up to 720 lb of bagged or bulk de-icing material. Available options include pivot mount, 2" Receiver Hitch (requires adapter mount), and 3-point hitch mount.\*

\*Mounts sold separately









## LOW PROFILE

# WHEN IT'S TIME FOR BACKUP

**Arm over the passenger seat. Eyes at six o'clock.** About half the time in a plow truck is spent running in reverse. The FISHER® lineup of Low Profile tailgate spreaders are designed for convenience and performance without affecting the view of the operator behind the wheel.



### MODEL 500 | 5.0 CU FT

- Designed for pickups or SUVs with a Class III trailer hitch
- Standard 2" receiver hitch mount for easy installation on many vehicles
- 12-volt motor inside sealed housing in the hopper for corrosion protection
- Direct drive, powder coated steel auger and agitator for reliable operation
- 10" diameter polyurethane spinner for long life performance
- Standard nylon ratchet straps for added stability
- Optional top screen and adjustable deflector
- Control features in-cab blast switch and variable speed control

### MODEL 1000 | 8.0 CU FT

- Low profile, high-density polyethylene hopper for long, corrosion-free life
- 12-volt motor inside sealed housing in the hopper for corrosion protection
- Direct drive, powder coated steel auger and agitator for reliable operation
- 10" diameter polyurethane spinner for long life performance
- Optional top screen, adjustable deflector and truck protector flap
- Available with a fixed mount, a Dual Swing Mount or a Class IV receiver hitch mount
- Control features in-cab blast switch and variable speed control

### MODEL 2500 | 8.5 CU FT

- Low profile, high-density polyethylene hopper for long, corrosion-free life
- 12-volt high-torque motor mounted inside a sealed housing in the hopper for corrosion protection
- Adjustable material deflectors for extra control
- Large 15" polyurethane spinner for even material spread
- Molded polyethylene cover to protect material from the elements
- Nylon ratchet straps for added stability
- Standard Class IV receiver hitch mount for easy attaching / detaching
- Control features in-cab blast switch and variable speed control

### (A) MODEL 2500 CONTROL SYSTEM

- Specialized feed gates and auger design combine to deliver complete and reliable flow control, reducing spillage and waste
- Feed gates are stainless steel with an added powder coat finish for 2x the corrosion protection
- Adjustable feed gates are located above the auger to deliver positive shut-off and absolute control over material distribution
- Saw tooth feed gate design cuts through material in the gate for easy operation and complete material shutoff
- 3-flight auger traps material more effectively resulting in less spillage even if feed gates are left open
- Optional 5-flight auger provides maximum control over small, pelletized material







## QUICK»CASTER™ 300W

**Mount it and go!** The FISHER® QUICK-CASTER™ 300W wireless electric tailgate spreader is the ultimate “plug ‘n’ play” spreader for ice control. The standard 2” receiver hitch and 7-pin plug make it easy to install on many vehicles without drilling or wiring, and the key fob control is *completely wireless!* Available with mount options to fit pickup trucks, SUVs, utility vehicles and tractors.

### SPREADER CAPACITY

The maintenance-free poly spreader holds up to 3 cubic feet of rock salt.

### WIRELESS CONTROLS

One-touch, on/off operation offers two spinner speeds to match the spread pattern to the job.

### EASY ON / OFF

Attaching and detaching the QUICK-CASTER 300W wireless electric tailgate spreader is easy with a standard 7-pin plug.

### 12-VOLT ELECTRIC MOTOR

Fully enclosed 12-volt electric motor and maximum torque transmission.

### SPINNER

A 10”, corrosion-free spinner ensures optimum delivery of bagged salt or ice melt and long-life performance.

### VEHICLE MOUNTS

Comes standard with a 2” receiver mount. Additional mounts available include a drop utility, 3-point, trailer and utility mount.

### CLEAR WEATHER COVER (ACCESSORY)

Available as an optional accessory, the transparent cover keeps material dry and flowing freely, while offering a clear view inside the hopper.



# PUSH IT TO THE LIMIT

## WALK-BEHIND SPREADERS

**Make short work of sidewalks, paths and driveways** with FISHER® professional walk-behind spreaders. Constructed of sturdy corrosion-free polyethylene, a powder coated steel frame and pneumatic tires, these spreaders handle bagged salt and other commercial ice-melt products, providing years of trouble-free performance.

### WB-100B BROADCAST SPREADER

The WB-100B broadcast spreader is ideal for broadcast-spreading wider areas such as driveways, courtyards, and wide walkways. 100 lb capacity.

### WB-160D DROP-STYLE SPREADER

The WB-160D drop-style spreader is perfect for drop-spreading along narrow walkways and keeping material out of adjoining landscape features. 160 lb capacity.



WB-100B



WB-160D

### STANDARD FEATURES

- Clear Hopper Cover
- 13” Pneumatic Tires
- Top Screen to Break Up Incoming Material
- Powder-Coated Steel Frame

### WB-100B ONLY

- Nylon-Composite Gear Drive
- 10” Molded Spinner





## HOPPER SPREADERS

Body Side Length	Capacity	Hopper Construction	Dimensions Overall (LxWxH)	AVAILABLE POWER OPTIONS & APPROX. WEIGHT (EMPTY)				Conveyor Width	Spinner Size	Spreading Width	Materials	Vehicle Application
				Dual 12V DC Sealed Motors	Gas 10.5 hp I/C Briggs & Stratton®	Gas 11 hp I/C Honda®	Dual Hydraulic Motors					
<b>STEEL-CASTER™ STAINLESS STEEL HOPPER SPREADERS</b>												
7'	1.5 cu yd	16 ga SS	84" x 50" x 38"	595 lb	—	—	—	16½"	15½"	Up to 40'	Salt, Sand, Salt/Sand Mix	¾- & 1-Ton Pickup Trucks
8'	2.0 cu yd	16 ga SS	96" x 50" x 40"	615 lb	740 lb	740 lb	615 lb	16½"	15½"	Up to 40'	Salt, Sand, Salt/Sand Mix	¾- & 1-Ton Pickup Trucks
9'	3.0 cu yd	16 ga SS	108" x 50" x 41"	695 lb	820 lb	820 lb	695 lb	16½"	15½"	Up to 40'	Salt, Sand, Salt/Sand Mix	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)
9'	4.5 cu yd	16 ga SS	108" x 70" x 47"	815 lb	940 lb	940 lb	815 lb	16½"	15½"	Up to 40'	Salt, Sand, Salt/Sand Mix	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)
10'	4.5 cu yd	16 ga SS	120" x 70" x 47"	—	965 lb	965 lb	840 lb	16½"	15½"	Up to 40'	Salt, Sand, Salt/Sand Mix	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)
10'	6.0 cu yd	16 ga SS	120" x 70" x 54"	—	1010 lb	1010 lb	885 lb	16½"	15½"	Up to 40'	Salt, Sand, Salt/Sand Mix	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)

## POLY-CASTER™ POLY/ELECTRIC HOPPER SPREADERS

7'	1.5 cu yd	Polyethylene	108" x 63" x 44"	591 lb	—	—	—	16½"	15½"	Up to 40'	Salt, Sand, Salt/Sand Mix	¾- & 1-Ton Pickup Trucks
8'	1.8 cu yd	Polyethylene	117" x 63" x 44"	660 lb	—	—	—	16½"	15½"	Up to 40'	Salt, Sand, Salt/Sand Mix	¾- & 1-Ton Pickup Trucks
8'	2.5 cu yd	Polyethylene	117" x 63" x 51"	734 lb	—	—	—	16½"	15½"	Up to 40'	Salt, Sand, Salt/Sand Mix	Dump Body or Flatbed Trucks (over 15,000 lb GVWR)

## POLY-CASTER LT™ POLY HOPPER SPREADER

5½'	0.5 cu yd	Polyethylene	77" x 48½" x 27"	386 lb	—	—	—	—	12"	Up to 40'	Salt or 50/50 Salt/Sand Mix	UTVs & Pickup Trucks
-----	-----------	--------------	------------------	--------	---	---	---	---	-----	-----------	-----------------------------	----------------------

## TAILGATE SPREADERS

Model	Capacity	Hopper Construction	Dimensions Overall (LxWxH)	Approximate Weight (empty)	Electric Motor	Auger (Diam. x Length)	Spinner Size	Spreading Width	Materials	Vehicle Application	Available Mounts
<b>SPEED-CASTER™ 525</b>	5.25 cu ft	Polyethylene	20½" x 38" x 34"	160 lb	Dual, 12-volt 1/3 hp	3" x 14" Heavy-Duty Solid Steel	10"	Up to 30'	Bagged Rock Salt, Sand, 50/50 Salt/Sand Mix	Tractors, SUVs, 1-Ton or Smaller Pickups	Standard 2" Receiver, 3-point Combo Mount
<b>SPEED-CASTER™ 900</b>	9.00 cu ft	Polyethylene	24" x 52" x 36"	180 lb	Dual, 12-volt 1/3 hp	3" x 20" Heavy-Duty Solid Steel	12"	Up to 40'	Bagged Rock Salt, Sand, 50/50 Salt/Sand Mix	Tractors, 1-Ton or Smaller Pickups	Pivot Mount, 2" Receiver Hitch (requires adapter mount), 3-point Hitch Mount*
<b>500 Low Profile</b>	5.00 cu ft	Polyethylene	21" x 39" x 34"	75 lb w/mount	1/3 hp	2.63" x 6"	10"	Up to 30'	Salt	Vehicles with Class III hitch	Standard Class III Receiver Hitch Mount
<b>1000 Low Profile</b>	8.00 cu ft	Polyethylene	19½" x 50½" x 35"	105 lb w/o mount	1/3 hp	2.63" x 6"	10"	Up to 30'	Salt	Full-Size Trucks (over 6,000 lb GVWR)	Optional Fixed Mount, Class IV Hitched Mount, Dual Swing Mount
<b>2500 Low Profile</b>	8.50 cu ft	Polyethylene	25" x 50" x 42"	131 lb w/mount	1/3 hp	2.63" x 9"	15"	Up to 30'	Salt	Full-Size Trucks (over 6,000 lb GVWR)	Standard Class IV Hitch Mount
<b>QUICK-CASTER™ 300W</b>	3.00 cu ft	Polyethylene	22" x 30" x 32"	68 lb	12-volt 1/3 hp	2½" x 5¾" Vertical High-Flow	10"	Up to 25'	Salt	Tractors, UTVs, SUVs, 1-Ton or Smaller Pickups	Standard 2" Receiver, Optional Drop Utility, Trailer, Utility, 3-point Mounts

## WALK-BEHIND SPREADERS

Model	Capacity	Hopper Construction	Dimensions Overall (LxWxH)	Approximate Weight (empty)	Spinner Size	Spreading Width	Materials
<b>WB-100B Broadcast Spreader</b>	100 lb	Polyethylene	50" x 26" x 28"	25 lb	10"	Up to 20'	Bagged Ice Melters & Bagged Rock Salt
<b>WB-160D Drop-Style Spreader</b>	160 lb	Polyethylene	48" x 38¼" x 36"	55 lb	—	3'	Bagged Ice Melters & Bagged Rock Salt

# COMPLETE YOUR FLEET

Official Genuine Factory Tough spreader accessories from Fisher Engineering enhance ice control performance and efficiency.



Fits: STEEL-CASTER™ (shown) and POLY-CASTER™

### WORK LIGHT KIT

For better visibility at rear of spreader at night



Fits: STEEL-CASTER

### STROBE LIGHT

For safety during operation



For STEEL-CASTER and POLY-CASTER (shown)

### LICENSE PLATE KIT

To illuminate alternate license plate location



Fits: STEEL-CASTER (shown) and POLY-CASTER

### VIBRATOR KIT

Helps move stubborn material



Fits: POLY-CASTER

### STAINLESS STEEL INVERTED V KIT

Helps reduce heavy startup loads on the drivetrain.



Fits: STEEL-CASTER

### MASTER ACCESSORY HARNESS

Required for first accessory on Gas & Hydraulic models, subsequent accessories will hook into the harness



Fits: STEEL-CASTER

### TIE DOWN CHAIN KIT

For superior in-bed stability and security



Fits: POLY-CASTER and POLY-CASTER LT™

### HOLD DOWN KIT

For in-bed stability and security



Fits: POLY-CASTER LT, SPEED-CASTER™ 525 and SPEED-CASTER™ 900

### MATERIAL CONTROL TUBE

Helps prevent leaking issues when handling fine pellet and flake materials



Fits: POLY-CASTER LT

### OPTIMUM FLOW KIT

Improves material flow and allows spreading of a 50/50 salt/sand mix with a vibrator and dual pitch baffle







Fisher Engineering | 50 Gordon Drive | Rockland, Maine 04841

fisherplows.com |    

Fisher Engineering reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Fisher Engineering or the vehicle manufacturer may require or recommend optional equipment for spreaders. Do not exceed vehicle ratings with a spreader. This product is manufactured under the following US patents: 5,375,773; 5,501,405; 6,253,470; 6,422,290; 6,944,978; 7,400,058; 7,430,821; 7,681,334; 7,737,576; 7,797,859; CAN patents 2,356,036. Fisher Engineering offers a limited warranty on all spreaders and accessories. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: FISHER®, HDX™, POLY-CASTER™, POLY-CASTER LT™, QUICK-CASTER™ 300W, SPEED-CASTER™ 525, SPEED-CASTER™ 900, STEEL-CASTER™

© 2015 Douglas Dynamics, LLC  
All rights reserved.

A DIVISION OF FISHER, LLC

Printed in U.S.A.  
Form No. 56871 - 7/15