

ANTHONY
LIFTGATES, INC.®

DCT




DCT-25 shown with 86" x 60" aluminum platform.

TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS): 2500, 3300

KEY ADVANTAGES

- 1. Large, Spring-Assist Wedge Platforms**
Plenty of working space, plus unique coil spring design provides effortless platform operation.
- 2. HD Mechanical Safety Latch**
Redundant-system stowage in addition to hydraulic lock.
- 3. Twin Cylinder Drive**
Powerful lift with low pressure helps to extend hydraulic component life.
- 4. EZ Mount**
Ships factory assembled, filled, and tested. Bolt-on ready.
- 5. Grease Free**
Service free bushings, used at all critical pivot points, reduce wear and never require lubrication.

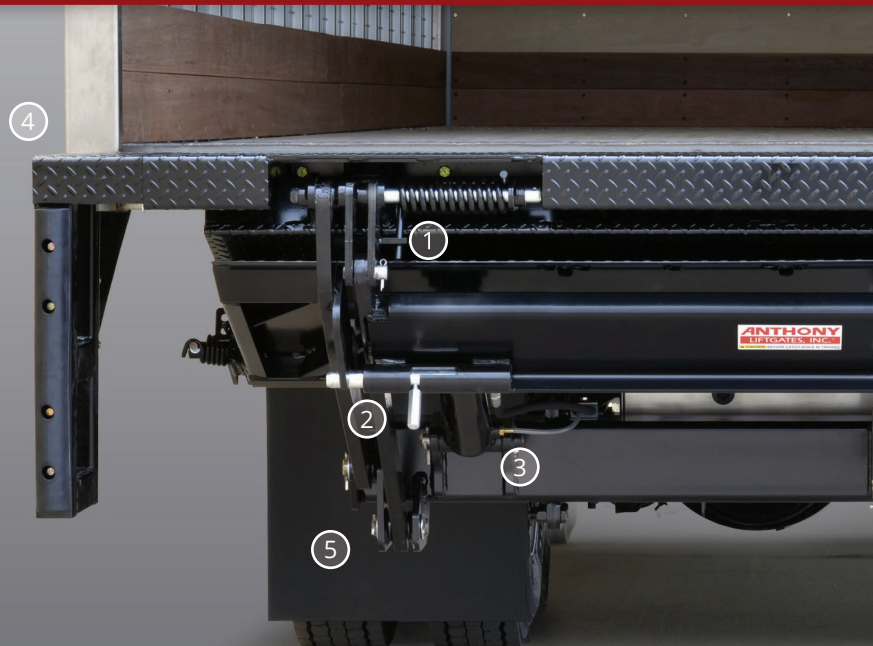

QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- CHS - Centralized Hydraulic System

All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.

- Max Duty Dock Bumpers

Helps protect floor extension from contact with dock. Includes bumper pads.

- Marine Duty Potted Toggle Switch

Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.

- Circuit Protection

Power cable with 200 Amp fuse protects truck wiring from a "dead short".

- Anthony Premium Polymer Finish

Steel components are washed, shot blast prepped, and coated with premium finish.

- Pressure Compensated Flow Valve

Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.

- Industry-Leading Warranty

2 years mechanical + 2 years electrical & hydraulic, parts and labor.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS AND CAPACITIES

Model	DCT-25	DCT-33
Capacity (lbs)	2500	3300
Bed Height - 50" platform	42" - 57"	
Bed Height - 60" platform	47" - 57"	
Available Platforms		
80" x 50" Wedge, Steel or Aluminum		
80" x 60" Wedge, Steel or Aluminum		
86" x 50" Wedge, Steel or Aluminum*		
86" x 60" Wedge, Steel or Aluminum*		

*86" wide platforms for 102" wide body only.

OPTIONS

- Cart stops
- Galvanized finish with extended warranty
- Power down
- Alternate floor extensions: Standard or heavy duty, 96" or 102" Wide.
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Alternative dock bumpers & steps
- Cab or ignition cutoff switch
- 2" receiver
- Auxiliary power & charge systems
- ICC Bumper

TRUCK MOUNTING REQUIREMENTS

A	B	C
Bed Height	Bed to Top of Tube Assembly	Mounting Plate
42" - 49"	19"	24 1/4"
50" - 51"	20"	23 3/4"
52" - 53"	21"	23 1/4"
54" - 55"	22"	22 5/8"
56" - 57"	23"	22 1/3"

The diagram illustrates the truck mounting requirements with the following labels:

- Bed Extension 12" (Reference)**: Dimension from the top of the bed to the top of the liftgate mounting plate.
- Body Crossmembers**, **Body Long Sills**, **Wood Filler**, **Chassis**, **Frame**: Labels for the truck's structural components.
- Liftgate Mounting Plate**: The component being mounted to the truck chassis.
- Pump Box Extends 3 1/2" Forward of Mounting Plate**: Dimension from the mounting plate to the front of the pump box.
- A**: Total height from the truck chassis to the top of the liftgate.
- B**: Height from the truck chassis to the top of the tube assembly.
- C**: Height from the truck chassis to the top of the mounting plate.

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com