


# **KEY ADVANTAGES**

- GLR Gentle Level Ride
  - Smooth, level up-down operation. Platform tilts gently at ground and re-levels before lifting cycle begins.
- Twin Cylinder Drive
  - Powerful lift with low pressure helps to extend hydraulic component life.
- Wedge Platform
- Wedge design provides easy, secure loading.
- Power Down
  - Reliable cycle time in all weather conditions.
- Lifetime Warrantied Service Free Bushings
  Used at all critical pivot points to reduce wear
  without the need for routine lubrication.



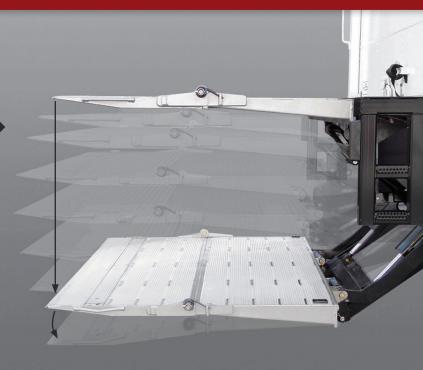

## STANDARD FEATURES

- Spring Assist Platform
- Dual torsion springs provide effortless platform operation.
- Ground Contact Rollers

Rollers prevent scraping damage to liftgate and concrete or asphalt.

- HD Mechanical Safety Latch

Redundant-system stowage in addition to hydraulic lock.

- Max Duty Dock Bumpers

Helps protect floor extension from contact with dock. Includes rubber bumpers.

- EZ Mount

Ships factory assembled, filled, and tested with notched center mark for easy installation. Floor extension may be bolted to the truck.

- Circuit Protection

200 Amp fuse protects truck wiring from a "dead short".

- CHS Centralized Hydraulic System
   All sensitive hydraulic and electrical components housed safely within the stainless steel pump box.
- Marine Duty Potted Toggle Switch
  Heavy duty toggle, potted to permanently
  separate and seal electrical connections
  from corrosion.
- **3/16" Steel Floor Extension**Rugged and attractive surface.

- Industry-Leading Warranty
   3 years mechanical + 3 years electrical
   & hydraulic, parts and labor.
- **Pressure Compensated Flow Valve**Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- Cab Cutoff Switch
   Prevents unauthorized liftgate operation.
- Anthony 3-Step Powder Coat
   Steel components are washed, shot blast prepped, and coated with premium finish.

# **QUALITY COMES STANDARD**

# **AVAILABLE MODELS, PLATFORMS AND CAPACITIES**


Model	Capacity (lbs)	Bed Height Range
MTU-GLR-25	2500	47" - 57"
MTU-GLR-3	3000	47" - 57"
MTU-GLR-4	4000	47" - 57"
MTU-GLR-5	5000	47" - 57"
MTU-GLR-6	6000	47" - 57"
Available Platforms		
Steel Main/Aluminum Flip 80" x 60" Wedge		
All Aluminum 80" x 60" Wedge*		

<sup>\*</sup>Not available on MTU-GLR-6.

## **OPTIONS**

- Alternate floor extensions: 3/16", 1/4", or 3/8" steel. 96" or 102" Wide.
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Stainless steel battery box
- Trail Charger, solar charging
- Third step add-on for dock bumper
- Galvanized finish with extended warranty
- ICC bumper trailer certified
- Ignition cut-off switch
- Trailer sub-frame mounting kit
- Dual, foot-operated cart stops

#### TRUCK MOUNTING REQUIREMENTS

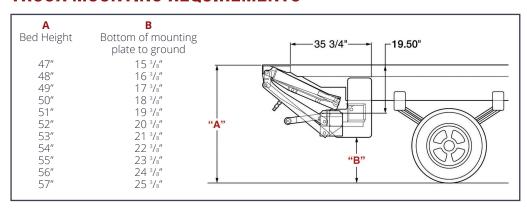

#### Anthony Liftgates, Inc.

1037 W. Howard Street

P.O. Box 615

Pontiac, IL 61764-0615

**Phone:** 815.842.3383 **Fax:** 815.844.3612

**Toll Free:** 800.482.0003

www.anthonyliftgates.com