





BOSSPLOW.COM


See how BOSS continues to BACK YOU UP.
Get more info, watch videos, find a dealer or chat live.


Call 800-286-4155
Email sales@bossplow.com



 Ask your dealer or visit bossplow.com to explore the complete lineup of BOSS products, including Truck Equipment, ATV/UTV Equipment, Heavy Equipment, Ice Control Equipment and Accessories.

 Exclusive to BOSS Owners, joining this community gives you a profile page, a free gift and access to special offers and information on BOSS products and services.

 SnowCare for Troops is a nationwide outreach program that performs free snow removal for the families of men and women serving overseas and disabled veterans.



BOSS PRODUCTS
2010 THE BOSS WAY
P.O. BOX 787
IRON MOUNTAIN, MI 49801-0787

BOSS SNOWFLOW PRODUCTS
ARE DESIGNED AND MANUFACTURED IN
AN APPROVED ISO 9001:2008
REGISTERED FACILITY.

Patents: www.ttopats.com
©2017 BOSS PRODUCTS. ALL RIGHTS RESERVED.
PRINTED IN U.S.A. FORM #450-2017

Hardox is a registered trademark of SSAB Technology. John Deere is a registered trademark of Deere & Company. Kubota is a registered trademark of Kubota Corporation. The "T" logo is a registered trademark/service mark of Facebook, Inc. The Twitter logo is a registered trademark/service mark of Twitter, Inc. The YouTube logo is a registered trademark/service mark of Google Inc. The Google+ logo is a service mark of Google Inc. The "in" logo is a registered service mark of LinkedIn Corporation. The Instagram logo is a registered trademark/service mark of Instagram, LLC. The Blogger logo is a registered service mark of Google Inc. The National IPA logo is a service mark of the National Intergovernmental Purchasing Alliance Company. The Advantage International Registrar logo is a trademark of Advantage International Registrar, Inc. All other trademarks belong to BOSS Snowplow.



HEAVY EQUIPMENT 2017

SNOWFLOWS





2

3

BOSS Heavy Equipment is engineered with all the same reliability and innovation as our truck plows and built to put the full force of your skid steer, tractor, backhoe or loader into pushing through winter's heaviest snowfalls. BOSS products for Heavy Equipment attach easily and offer a large carrying capacity. And because it's from BOSS, you can be sure this Heavy Equipment is durable and packed with features to make your job easier and more efficient. Because BOSS is always there to BACK YOU UP.

TABLE OF CONTENTS

- 4 Backhoe & Loader Box Plows
- 6 Skid Steer Box Plows
- 8 Skid Steer Plows
- 10 Tractor Plows
- 12 Accessories / Specifications

OPTIMIZED POWER IN EVERY PUSH

Be at your best when Mother Nature is at her worst with the powerful BH and LDR Box Plows from BOSS. They attach quickly and easily to backhoes or loaders and work efficiently to help you RESTORE ORDER to the lots of your community. BOSS Box Plows are equipped with innovative protection technology that helps get the job done faster, easier and more efficiently. That's how BOSS BACKS YOU UP.

STANDARD FEATURES:


➤ BH 12'
LDR 14', 16'

- **High-Efficiency Moldboard** features a 70-degree attack angle that "rolls" the snow and reduces resistance.
- **Exclusive Self-Adjusting Box Wings** automatically adjust to the contour of the pavement.
- **Universal Fork Mounting System** attaches quickly and easily with a simple slide. Wear shims reduce wear on hitch system, preventing binding and are easily replaceable.
- **Segmented Trip-Edge Design** is engineered so each cutting edge segment trips individually.

- **Heavy-Duty Trip Springs** are tough, tested and proven in some of the harshest environments.
- **Exclusive Support Struts** pivot for structural strength, stability and long-term reliability.
- **AR450 Hardox® Wing Shoes** provide superior wear resistance for long-term durability.

▶ SEE IT IN ACTION
BOSSPLOW.COM


Cutting Edge segments are reversible to maximize wear life (LDR only).



Universal Fork Mounting System attaches quickly and easily with a simple slide (Fork Mounting System for LDR Box Plows featured below).



Heavy-Duty Trip Springs are tough, tested and proven in some of the harshest environments.



Exclusive SmartShield® finish delivers durable corrosion protection and a long-lasting, high-gloss shine.



High-Efficiency
Moldboard

Exclusive Support
Struts



Reversible Cutting Edge
(LDR only)

Segmented Trip-Edge
Design

Self-Adjusting
Box Wings

AR450 Hardox®
Wing Shoes

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

UNLOCK YOUR SKID STEER'S FULL POWER

SK Box Plows from BOSS are designed to put the full force and maneuverability of your skid steer into getting the pavement BACK TO BLACK. The floating edge and pivot system keep the cutting edge in contact with the pavement regardless of the contour, and because it's from BOSS, you know the SK Box Plow is tough and durable enough to BACK YOU UP through any job.

SK 8', 10', 12'

STANDARD FEATURES:

QUESTIONS? CHAT LIVE ONLINE.
BOSSPLOW.COM

- > **High-Efficiency Moldboard** features a 70-degree attack angle that "rolls" the snow and reduces resistance.
- > **1/2" x 6" Durable Cutting Edge** delivers outstanding resistance to impact and abrasion.
- > **Universal Skid Steer Attachment Plates** provide built-in float and pivot features that optimize plowing performance and angle on uneven, rough surfaces.
- > **Heavy-Duty Trip Springs** are tough, tested and proven in some of the harshest environments.
- > **Heavy-Duty Wing Shoes** provide superior wear resistance for long-term durability.
- > **Universal Coupler System** allows the SK8, SK10 and SK12 to attach to most skid steers.
- > **Bolt-On Wing Design** allows quick and easy replacement of wing if damage occurs.
- > **SmartShield®** features our exclusive epoxy-based primer, which provides one of the toughest and most corrosion-resistant paint finishes in the industry.

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.



Features a universal coupler that attaches to most skid steer attachment systems. Available in 8', 10' and 12' sizes.



SKID STEER PLOWS

ROLL WITH WINTER'S PUNCHES

BOSS Straight-Blade Trip-Edge Snowplows for Skid Steers are engineered to power through the heaviest snow and any obstacles that come with it. The extra-rigid moldboard and trip-edge technology ensure that only the cutting edge trips when you hit an obstacle, so you won't lose the load you're pushing. Trip-Edge Skid Steer Snowplows feature four adjustable trip return springs, so you can customize the trip spring tension for the job at hand. Available in steel and stainless steel, BOSS Trip-Edge Skid Steer Snowplows are built to BACK YOU UP.



STANDARD FEATURES:

- Steel for Skid Steer 8', 9'
- Stainless Steel for Skid Steer 8', 9'

- **Trip-Edge Design** helps to prevent plow damage when an obstacle is encountered.
- **Adjustable Trip Springs** allow you to customize the trip spring tension.
- **Cast-Iron Plow Shoes** provide extended life to cutting edge compared to steel shoes.
- **Reinforced Moldboard** increases blade rigidity for increased durability.

- **Universal Skid Steer Attachment Plates** provide built-in float and pivot features that optimize plowing performance and angle on uneven, rough surfaces.
- **Adjustable Mounting Height** accommodates both track and wheel skid steer loaders.

SEE HOW BOSS BACKS YOU UP. BOSSPLOW.COM



*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

Trip-Edge



Adjustable Trip Springs



8' Super-Duty Trip-Edge Steel Skid Steer



YOUR TRACTOR JUST GOT TOUGHER

Straight-blade and V-plow attachment options are now available to turn your tractor into a powerful ally in the war on snow. Our tractor undercarriages attach BOSS plows to your tractor quickly and easily, letting you RESTORE ORDER using the full power of your John Deere® or Kubota® tractor. The complete plow package includes a blade crate, plow box, tractor undercarriage and control kit. Find out what your tractor can do when BOSS BACKS YOU UP.



10

11

John Deere 3 & 4 Series

HTX Straight-Blade
HTX V-Plow

John Deere 5 Series and Kubota Grand L40

DXT Super-Duty Straight-Blade Plows
XT Standard-Duty Straight-Blade Plows
EXT Trip-Edge Plows

Additional applications coming soon! Visit bossplow.com for more details.

FEATURES:

 LEARN MORE ABOUT BOSS PRODUCTS
BOSSPLOW.COM

- > **John Deere 3 & 4 Series Tractor Models** are compatible with HTX Straight-Blade and V-Plows.
- > **John Deere 5 Series and Kubota Grand L40 Tractor Models** work with DXT, XT, Super-Duty Straight-Blades, EXT, Standard-Duty Straight-Blade Plows and Trip-Edge Plows.


- > **Complete Plow Package** includes blade crate, plow box, tractor undercarriage and control kit.
- > **Truck Plows for Tractors** use your existing truck plow on your tractor with no modifications.

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.



BOSS SNOWPLOW AUTHORIZED ACCESSORIES

HEAVY-EQUIPMENT ACCESSORIES

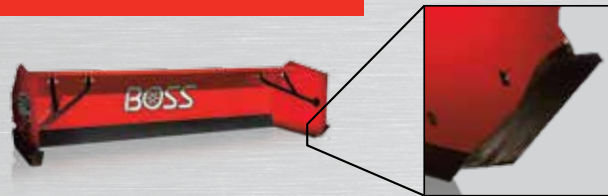

AR450 HARDOX® WING SHOES

Experience superior wear resistance and long-term durability with the Hardox® wing shoes designed specifically for your LDR, BH and SK Box Plows.

SK WING SHOE (RIGHT SIDE)	BXP16589
SK WING SHOE (LEFT SIDE)	BXP16590
BH WING SHOE (RIGHT SIDE)	BXP16755
BH WING SHOE (LEFT SIDE)	BXP16855
LDR WING SHOE (RIGHT SIDE)	BXP16792
LDR WING SHOE (LEFT SIDE)	BXP16791



UNIVERSAL BOX PLOW COUPLER KIT

The Universal Box Plow Coupler Kit offers a quick connect/disconnect option when attaching a BOSS BH or LDR Box Plow to the arms of a loader.

BOX PLOW UNIVERSAL COUPLER KIT BXP16881

HITCH WEAR SHIMS

The Box Plow Hitch Wear Shims reduce wear on the hitch system, preventing binding on the hitch, and are easily replaceable.

BOX PLOW HITCH WEAR SHIM KIT BXP16846



TRACTOR PLOWS

SUPER-DUTY STRAIGHT-BLADE

TRACTOR APPLICATION: JOHN DEERE® 5 SERIES AND KUBOTA® GRAND L40 TRACTOR MODELS

SPECIFICATIONS	7'6" Super-Duty Steel	8' Super-Duty Steel	8'6" Super-Duty Steel	9' Super-Duty Steel
Blade Width (Straight)	90" (229 cm)	96" (244 cm)	102" (259 cm)	108" (274 cm)
Plowing Width @ 30° Angle	78" (198 cm)	83" (211 cm)	88" (224 cm)	93½" (238 cm)
Blade Height	29" (74 cm)	29" (74 cm)	29" (74 cm)	29" (74 cm)
Blade Thickness	11-ga Steel	11-ga Steel	11-ga Steel	11-ga Steel
Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	7 vertical, 2 diagonal	7 vertical, 2 diagonal	7 vertical, 2 diagonal	7 vertical, 2 diagonal
Plow Shoes	Cast iron	Cast iron	Cast iron	Cast iron
Trip Springs	4	4	4	4
Angle Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Shock Absorber	1	1	1	1
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	680 lb ^B (308 kg)	698 lb ^B (317 kg)	720 lb ^B (327 kg)	742 lb ^B (337 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^BVehicle mount weight range: 75-105 lb (34-48 kg).



EXT

TRACTOR APPLICATION: JOHN DEERE® 5 SERIES AND KUBOTA® GRAND L40 TRACTOR MODELS

SPECIFICATIONS	EXT 8' Retracted and 10' Expanded	SPECIFICATIONS	EXT 8' Retracted and 10' Expanded
Blade Width (Retracted)	96" (244 cm)	Trip Springs	4
Blade Width (Extended)	120" (305 cm)	Angle Cylinders	1½" x 10" (4 cm x 25 cm)
Plowing Width @ 30° Angle	83" (211 cm)-IN, 103" (262 cm)-OUT	Wing Cylinders	1½" x 1½" x 12¾" (4 cm x 3 cm x 32 cm)
Blade Height	30" (76.2 cm)	Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Blade Thickness	11-ga Steel	Shock Absorber	1
Cutting Edge	½" (1.27 cm) AR450	Attachment System	SmartHitch 2
Reinforcement Ribs	9 vertical	Plow Weight*	970 lb ^B
Plow Shoes	Optional	Plow Lights	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^BVehicle mount weight range: 75-105 lb (34-48 kg).

TRACTOR PLOWS

XT

TRACTOR APPLICATION: JOHN DEERE® 5 SERIES AND KUBOTA® GRAND L40 TRACTOR MODELS



SPECIFICATIONS	7'6" XT Steel	8'2" XT Steel / Poly	9'2" XT Steel / Poly**
Blade Width (Straight)	90" (229 cm)	98" (249 cm)	110" (279 cm)
Plowing Width (V position)	81" (206 cm)	88" (224 cm)	99" (252 cm)
Plowing Width (Scoop)	74" (188 cm)	81" (206 cm)	92" (234 cm)
Plowing Width @ 30° Angle	77" (196 cm)	85" (216 cm)	95" (241 cm)
Blade Height	36" (91 cm) at end, 30" (76 cm) at center	37" (94 cm) at end, 30" (76 cm) at center	38" (96.52 cm) at end, 30" (76 cm) at center
Blade Thickness	14-ga Steel	11-ga Steel / ⅜" (1 cm) Poly	11-ga Steel / ⅜" (1 cm) Poly
Cutting Edge (AR450)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs	4	4	4
SmartLock Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	713 lb ^B (323 kg)	785 lb ^B (356 kg) / 795 lb ^B (361 kg)	842 lb ^B (382 kg) / 852 lb ^B (387 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^BVehicle mount weight range: 75-105 lb (34-48 kg).

HTX V AND STRAIGHT-BLADES

TRACTOR APPLICATION: JOHN DEERE® 3 & 4 SERIES TRACTOR MODELS



SPECIFICATIONS	7'6" HTX V-Plow Steel	7' Steel / Poly / Stainless HTX	7'6" Steel / Poly / Stainless HTX
Blade Width (Straight)	90" (229 cm)	84" (213 cm)	90" (229 cm)
Plowing Width @ 30° Angle	78" (198 cm)	73" (185 cm)	78" (198 cm)
Blade Height	32" (81 cm) at end, 25" (63 cm) at center	26" (66 cm)	26" (66 cm)
Plowing Width (V position)	81" (206 cm)	N/A	N/A
Plowing Width (Scoop)	74" (188 cm)	N/A	N/A
Blade Thickness	14-ga Steel	14-ga (0.19 cm) Mild Steel / ¼" (0.6 cm) Poly / 14-ga (0.19 cm) Stainless Steel	14-ga (0.19 cm) Mild Steel / ¼" (0.6 cm) Poly / 14-ga (0.19 cm) Stainless Steel
Cutting Edge	¾" x 6" (1.9 cm x 15 cm)	¾" x 6" (1.9 cm x 15 cm)	¾" x 6" (1.9 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	4 vertical, 2 diagonal	6 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs	2	2	2
SmartLock Cylinders	1¼" x 8¼" (3 cm x 21 cm)	N/A	N/A
Angle Cylinders	N/A	1½" x 6½" (4 cm x 17 cm)	1½" x 6½" (4 cm x 17 cm)
Lift Cylinder	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	490 lb ^A (222 kg)	393 lb ^A (178 kg) / 367 lb ^A (166 kg) / 393 lb ^A (178 kg)	440 lb ^A (200 kg) / 416 lb ^A (188 kg) / 440 lb ^A (200 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^AVehicle mount weight range: 45-75 lb (20-34 kg).

STANDARD-DUTY STRAIGHT-BLADE

TRACTOR APPLICATION: JOHN DEERE® 5 SERIES AND KUBOTA® GRAND L40 TRACTOR MODELS



SPECIFICATIONS	7'6" Standard-Duty Steel	SPECIFICATIONS	7'6" Standard-Duty Steel
Blade Width (Straight)	90" (229 cm)	Trip Springs	3
Plowing Width @ 30° Angle	78" (198 cm)	Angle Cylinders	1½" x 10" (4 cm x 25 cm)
Blade Height	27½" (70 cm)	Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Blade Thickness	14-ga high-strength Steel	Shock Absorber	1
Cutting Edge	¾" x 6" (1.9 cm x 15 cm)	Attachment System	SmartHitch 2
Reinforcement Ribs	7 vertical	Plow Weight*	597 lb ^B (271 kg)
Plow Shoes	Cast iron	Plow Lights	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^BVehicle mount weight range: 75-105 lb (34-48 kg).

TRACTOR PLOWS

DXT

TRACTOR APPLICATION: JOHN DEERE® 5 SERIES AND KUBOTA® GRAND L40 TRACTOR MODELS



SPECIFICATIONS	8'2" Steel / Poly / Stainless DXT	9'2" Steel / Poly / Stainless DXT
Blade Width (Straight)	98" (249 cm)	110" (279 cm)
Blade Width (V)	88" (224 cm)	99" (251 cm)
Blade Width (Scoop)	81" (206 cm)	92" (234 cm)
Plowing Width @ 30° Angle	85" (216 cm)	95" (241 cm)
Blade Height	30" (76 cm) at center, 37½" (95 cm) at ends	30" (76 cm) at center, 37½" (95 cm) at ends
Blade Thickness	11-ga Steel / ¾" Poly / 12-ga 304 Stainless Steel	11-ga Steel / ¾" Poly / 12-ga 304 Stainless Steel
Base Angle	½" x 6" (1.3 cm x 15 cm)**	½" x 6" (1.3 cm x 15 cm)**
Reinforcement Ribs	6 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional
Trip Springs (Moldboard)	4 Extension Springs	4 Extension Springs
Trip Springs (Base Angle)	6 total	6 total
SmartLock Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch 2	SmartHitch 2
Plow Weight*	868 lb ^g (394 kg) / 878 lb ^g (398 kg) / 920 lb ^g (417 kg)	925 lb ^g (420 kg) / 935 lb ^g (424 kg) / 977 lb ^g (433 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^gVehicle mount weight range: 130-160 lb (59-73 kg). **The tripping base angles on the DXT come standard with curb guards and patented snow catcher, and they can be used as the cutting edge until worn. The optional cutting edge is made from Hardox[®] for maximum wear resistance and durability.

SKID STEER PLOWS

TRIP-EDGE SUPER-DUTY STRAIGHT-BLADE

TRACTOR APPLICATION: JOHN DEERE® 5 SERIES, KUBOTA® GRAND L40 TRACTOR MODELS AND SKID STEER



SPECIFICATIONS	7'6" Trip-Edge Steel	8' Trip-Edge Steel / Stainless	9' Trip-Edge Steel** / Stainless
Blade Width (Straight)	90" (229 cm)	96" (244 cm)	108" (274 cm)
Plowing Width @ 30° Angle	78" (198 cm)	83" (211 cm)	93½" (238 cm)
Blade Height	31" (79 cm)	31" (79 cm)	31" (79 cm)
Blade Thickness	11-ga Steel	11-ga Steel / 14-ga 304 Stainless	11-ga Steel / 14-ga 304 Stainless
Base Angle	½" x 3½" (1.3 cm x 9 cm)	½" x 3½" (1.3 cm x 9 cm)	½" x 3½" (1.3 cm x 9 cm)
Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Cast iron	Cast iron	Cast iron
Trip Springs	4	4	4
Trip Pivot Pin Diameter	1" (3 cm)	1" (3 cm)	1" (3 cm)
Trip Spring Type	¾" (1 cm) hooked extension spring	¾" (1 cm) hooked extension spring	¾" (1 cm) hooked extension spring
Trip-Edge Adjustable	Standard	Standard	Standard
Angle Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	796 lb ^g (361 kg)	809 lb ^g (367 kg) / 836 lb ^g (379 kg)	857 lb ^g (389 kg) / 888 lb ^g (403 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^gVehicle mount weight range: 75-105 lb (34-48 kg).

BOX PLOWS

SK BOX PLOWS

VEHICLE APPLICATION: SKID STEERS



SPECIFICATIONS	SK 8'	SK 10'	SK 12'
Width	8'4" (254 cm)	10'4" (315 cm)	12'4" (376 cm)
Approximate Weight	900 lb (409 kg)	1000 lb (455 kg)	1245 lb (564.72 kg)
Moldboard Height	30" (76 cm)	30" (76 cm)	30" (76 cm)
Base Angle	½" x 3½" x 3½" (1 cm x 9 cm x 9 cm)	½" x 3½" x 3½" (1 cm x 9 cm x 9 cm)	½" x 6" x 3½" (1 cm x 15 cm x 9 cm)
Moldboard Thickness	11-ga Steel	11-ga Steel	11-ga Steel
Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Trip Design	Trip-edge	Trip-edge	Trip-edge
Trip Springs	4	4	8
Wing Dimensions	30¾" x 38" (78 cm x 97 cm)	30¾" x 38" (78 cm x 97 cm)	30¾" x 38" (78 cm x 97 cm)
Wing Thickness	¼" (1 cm)	¼" (1 cm)	¼" (1 cm)
Wing Leveling	Automatic	Automatic	Automatic
Vertical Supports	6	8	10
Horizontal Supports	1 upper pan/3 lower pans	3 upper pans/5 lower pans	3 upper pans/5 lower pans
Attachment Strategy	Universal Coupler	Universal Coupler	Universal Coupler
Vertical Hitch Float	Automatic	Automatic	Automatic
Wing Shoes (Material)	AR 450 Hardox	AR 450 Hardox	AR 450 Hardox

Consult product selector tool at bossplow.com for recommended applications.

BH AND LDR BOX PLOWS

VEHICLE APPLICATION: BACKHOE AND LOADERS



SPECIFICATIONS	BH 12'	LDR 14'	LDR 16'
Width	12' (366 cm)	14' (427 cm)	16' (466 cm)
Approximate Weight	2000 lb (907 kg)	3190 lb (1446 kg)	3320 lb (1505 kg)
Moldboard Height	38" (97 cm)	49" (124 cm)	49" (124 cm)
Base Angle	½" x 6" x 35½" (1 cm x 15 cm x 91 cm)	½" x 5½" x 27" (1 cm x 14 cm x 70 cm)	½" x 5½" x 30½" (1 cm x 14 cm x 79 cm)
Moldboard Thickness	11-ga Steel	11-ga Steel	11-ga Steel
Segmented Cutting Edges	½" x 8" x 35½" (1 cm x 20 cm x 91 cm) (AR 400)	¾" x 8" x 27" (2 cm x 20 cm x 70 cm) (AR 400)	¾" x 8" x 30½" (2 cm x 20 cm x 79 cm) (AR 400)
Trip Design	Segmented trip-edge	Segmented trip-edge	Segmented trip-edge
Wing Dimensions	40" x 56" (102 cm x 142 cm)	48" x 58½" (122 cm x 149 cm)	48" x 58½" (122 cm x 149 cm)
Wing Thickness	¾" (1 cm)	¾" (1 cm)	¾" (1 cm)
Wing Leveling	Automatic	Automatic	Automatic
Vertical Supports	12	15	15
Horizontal Supports	5 upper pans/7 lower pans	3 upper pans/3 lower pans	3 upper pans/3 lower pans
Attachment Strategy	Universal Bucket Receiver, 3" Opening Binder Chain (Customer-supplied)	Universal (ADJ) Bucket Receiver, 3" Opening Binder Chain (Customer-supplied)	Universal (ADJ) Bucket Receiver, 3" Opening Binder Chain (Customer-supplied)
Vertical Hitch Float	Automatic – 8" (20 cm) vertical	Automatic – 9½" (25 cm) vertical	Automatic – 9½" (25 cm) vertical
Wing Shoes (Material)	AR 450 Hardox	AR 450 Hardox	AR 450 Hardox

Consult product selector tool at bossplow.com for recommended applications.

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

TWO-YEAR LIMITED WARRANTY

All BOSS Snowplows and equipment are guaranteed to be free from defects in material and workmanship for two full years from the date of purchase. Stop by any authorized BOSS Dealer to receive complete details on our two-year parts and labor warranty. Please visit bossplow.com for more details.

LEGAL STATEMENT

Vehicles intended to be equipped with a spreader and/or snowplow must comply with the vehicle manufacturers' specifications for equipment application. BOSS Products reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein. BOSS Products may be protected by one or more patents; please see bossplow.com for more details.