

Introducing the all-new

TUCKUNDER SERIES

TKT FEATURES

Tuckunder Series

The Tommy Gate Tuckunder Series offers large platforms and high lifting capacities while also providing the convenience of folding and storing underneath the vehicle bed. Available with both treadplate steel and extruded aluminum platforms, these lifts are the most popular style of liftgates on the market.

Included Features

- LARGE, RUBBER DOCK BUMPERS
 protect the bed extension
- 2 UNDERRIDE IMPACT GUARD protects from rear vehicle underride
- FULLY-ENCLOSED POWER UNIT protects hydraulic pump and motor

TKT models address all the concerns a liftgate operator faces. With self-leveling and power down functions, the lift is simple to use and reliable. The large platforms easily accommodate pallet-sized loads. And, the wide-arm, dual-cylinder design assures sturdy and consistent lifting action.

NEW **LOW-PROFILE CONTROL** SIMPLIFIES LIFTGATE OPERATION



TOMMY GATE

TOMMY GATE® QUALITY

Like all Tommy Gate hydraulic lifts, the main assembly of the Tuckunder Series is cut from raw steel, formed into precision parts, and hand-welded. TKT models are then painted before assembly to reduce exposure and corrosion. This entire process is completed on site at the Tommy Gate factory in Woodbine, lowa. To learn more about Tommy Gate and the Tuckunder Series, visit tommygate.com

TOMMYGATE.COM/TUCKUNDER

TKT AT A GLANCE



Power-Down



Dual-Cylinder



Self-Leveling




Wedge Platform



Liftgate Function (SIDE VIEW)

- 1 Platform lowers away from bed level
- 2 Platform remains level at mid-travel
- 3 Platform is level when 'knuckle' is at ground level
- 4 A secondary function tilts the platform loading edge to ground level (self-leveling)

GROUND LEVEL

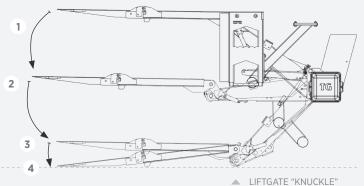



Available Models (DUAL-CYLINDER, POWER-DOWN, SELF-LEVELING)

TWO-YEAR STANDARD WARRANTY

	Model Number	Load Area	Bed Heights	Gate Weight
2500 lb. Capacity	<u>Treadplate Platforms</u>			
	TKT-80-25 TP50	80 x 50	40-54	887
	TKT-80-25 TP60	80 x 60	45-54	980
	<u>Aluminum Platforms</u>			
	TKT-80-25 EA50	80 x 50	40-54	816
	TKT-80-25 EA60	80 x 60	45-54	866
3000 lb. Capacity	<u>Treadplate Platforms</u>			
	TKT-80-30 TP50	80 x 50	40-54	887
	TKT-80-30 TP60	80 x 60	45-54	980
	<u>Aluminum Platforms</u>			
	TKT-80-30 EA50	80 x 50	40-54	816
	TKT-80-30 EA60	80 x 60	45-54	866

Available Bed Extension Options

Body Size	Extension Type	Extension Weight	Description
96"	Standard	276	"standard" strength 3/16-inch thick steel construction
96"	Heavy Duty	334	"heavy duty" strength 3/8-inch thick steel construction
102"	Standard	283	"standard" strength 3/16-inch thick steel construction
102"	Heavy Duty	341	"heavy duty" strength 3/8-inch thick steel construction

Features & Options

Option	Description		
<u>Standard Features</u>			
Rubber Dock Bumpers	protect the bed extension from direct contact with loading dock surface		
Underride Impact Guard	a low, full-width guard bar protects from rear vehicle underride		
Platform Power Down	offers consistent platform action both upwards and downwards		
Fixed Toggle Control	a low-profile control with five-minute inactivity shut-off		
Snubber Kit	secures the platform when stored		
Standard Power Cable	38-foot, 2-gauge, full-length power and ground		
Additional Options			
Split Cart Stops *	secure wheeled cargo, aluminum platforms only		
2-light, LED Light Kit	2-light add-on system (T-80) (one red, one white each side)		
Dual Controls	standard fixed control + remote pendant control		
Extended Power Cable	41-foot cable, 2-gauge, full-length power and ground		
24-volt System	compatible with vehicles running a 24-volt system		
License Plate Mount	bracket place holder with light		
In-Line Power Shut-Off	disables power to the liftgate along the power line		
In-Cab, Shut-off Switch	disables power to the liftgate from within the truck cab		

^{*} Aluminum platforms lose 10 inches of loading depth when cart stops are deployed.



