



GAS DRIVEN AIR COMPRESSOR

THE MOST AFFORDABLE GAS DRIVEN ROTARY SCREW AIR COMPRESSOR AVAILABLE!



G30

“The Honda has a lower idle speed, creating less noise, which is much appreciated when used in residential settings. There is zero lag on air tools under high demand. We’ve been using VMAC for so long that old issues have been forgotten.”

-Chris Binks, Assistant Manager, KAL TIRE

30 CFM. 100% OF THE TIME.

VMAC G30 gas driven air compressors include a patented 30 CFM rotary screw air compressor designed to produce full air power, 100% of the time, so you don't need an air receiver tank. Get jobs done faster, without interruption.


50% LIGHTER & SMALLER

VMAC G30 gas driven air compressors are engineered and manufactured for mobile applications. VMAC air compressors feature the latest rotary screw technology integrated into a compact, turn-key package that is significantly lighter and smaller than any other competitive model. Fit more tools, equipment and supplies on your truck, without hassle.

INDUSTRY-LEADING RELIABILITY

VMAC G30 gas driven air compressors are proven to work in extreme cold climates across North America when ordered with factory-installed cold climate kits. Engines supplied by Honda come with an industry-leading 3-year warranty and VMAC rotary screw air compressors come with the industry's first Lifetime Limited Warranty. For peace of mind, without the headache.



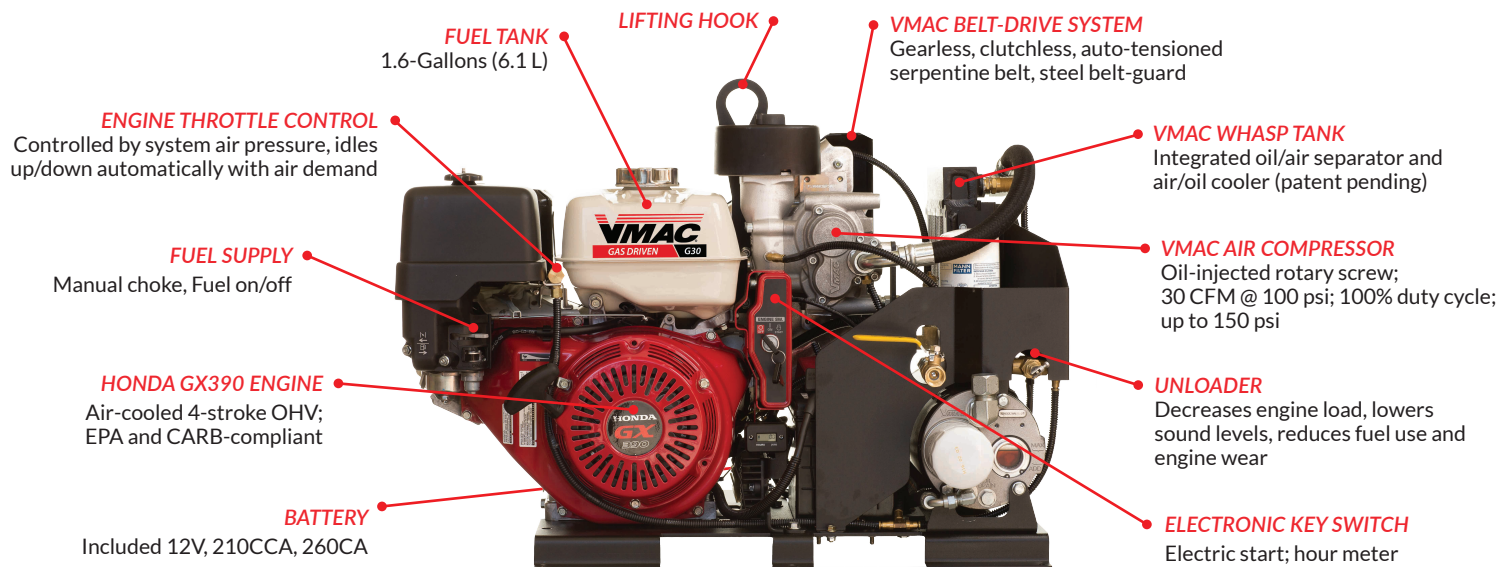

SPECIFICATIONS

| | |
|--------------------------------------|--|
| Air Compressor Output | 30 CFM @ 100 PSI (150 PSI max) |
| Compressor Type | Belt-driven, 100% duty cycle, VMAC oil-injected rotary screw |
| Engine | <ul style="list-style-type: none"> > Honda GX390 air cooled 4-stroke OHV with electric start, EPA and CARB compliant, > Honda approved application |
| Weight (wet) | Approx. 205 lbs (93 kg) |
| Dimensions | 23.9" (h) x 21.4" (w) x 33.5" (l) / 60.7cm (h) x 54.4cm (w) x 85.1cm (l) |
| Mounting Plate | 19.125" (w) x 25.0" (l) / 48.6cm (w) x 63.5cm (l) |
| Decibels (dB) @ 20 feet (6.1 meters) | 67 - 81 dB |
| Fuel Tank Capacity | 1.6-Gallons (6.1 litres) |
| Battery (included) | 12V, 210 CCA, 260 CA |
| Safety Features | <ul style="list-style-type: none"> > Compressor thermal protection circuit > Automatic rapid blow-down valve on tank > 200 psi pressure relief valve > Low engine oil pressure shutoff |

Warranty



> Two years on all major components; VMAC air-ends are covered by VMAC's Lifetime Limited Warranty;
 > Honda engine is covered by Honda's 36-month Limited Warranty

OPTIONAL ACCESSORIES

COLD CLIMATE KIT*

A500044

Heats up the G30 on the way to the jobsite, recommended in below freezing temperatures
 *120V power source required



REMOTE CONTROL PANEL

A500042

Remote control panel with a ten foot extension for key switch, hour meter, choke, and unloader



600 W POWER INVERTER

A500181

600 W, 12 V power inverter; required to power the VMAC G30 gas driven air compressor cold climate kit.



LOW PROFILE AIR RECEIVER TANKS 8 or 12 GALLONS

A500183/A500188

Dual or triple 4-gallon air receiver tanks with G30 mounting frame that includes gauge, fittings, hose, and valves



VMAC DEALER INFORMATION:

VMAC
AIR INNOVATED

T: 250-740-3200 | Toll Free: 1-877-912-6605 | Fax: 250-740-3201

E: sales@vmacair.com | www.VMACAIR.com

M200909