

Front Mount Telescopic

63108T

- For trucks with 102" to 114" CT
- Designed for trucks with 33,000 to 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 108" stroke
- For 10' to 13' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 941 lbs.

Model 63108T Class 100

5384T

- For trucks with 72" to 84" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 10 gallon reservoir
- One 5" 3 stage cylinder 84" stroke
- For 9' to 10' body lengths
- 45 to 50 degree dump angle
- 6" longitudinal recommended
- Weight 664 lbs.

Model 5384T



74135T

- For trucks with 132" to 144" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 135" stroke
- For 16' and 17' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1045 lbs.

Model 74135T Class 120

73120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 3 stage cylinder 120" stroke
- For 14" to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1018 lbs.

Model 73120T Class 120

63120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 120" stroke
- For 14' to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 951 lbs.

Model 63120T Class 110

74156T

- For trucks with 156" to 180" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 156" stroke
- For 18' and 19' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1085 lbs.

Model 74156T

Front Mount Telescopic

63108T

- For trucks with 102" to 114" CT
- Designed for trucks with 33,000 to 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 108" stroke
- For 10' to 13' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 941 lbs.

Model 63108T Class 100

5384T

- For trucks with 72" to 84" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 10 gallon reservoir
- One 5" 3 stage cylinder 84" stroke
- For 9' to 10' body lengths
- 45 to 50 degree dump angle
- 6" longitudinal recommended
- Weight 664 lbs.

Model 5384T



74135T

- For trucks with 132" to 144" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 135" stroke
- For 16' and 17' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1045 lbs.

Model 74135T Class 120

73120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 3 stage cylinder 120" stroke
- For 14" to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1018 lbs.

Model 73120T Class 120

63120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 120" stroke
- For 14' to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 951 lbs.

Model 63120T Class 110

74156T

- For trucks with 156" to 180" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 156" stroke
- For 18' and 19' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1085 lbs.

Model 74156T

Front Mount Telescopic

63108T

- For trucks with 102" to 114" CT
- Designed for trucks with 33,000 to 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 108" stroke
- For 10' to 13' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 941 lbs.

Model 63108T Class 100

5384T

- For trucks with 72" to 84" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 10 gallon reservoir
- One 5" 3 stage cylinder 84" stroke
- For 9' to 10' body lengths
- 45 to 50 degree dump angle
- 6" longitudinal recommended
- Weight 664 lbs.

Model 5384T



74135T

- For trucks with 132" to 144" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 135" stroke
- For 16' and 17' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1045 lbs.

Model 74135T Class 120

73120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 3 stage cylinder 120" stroke
- For 14" to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1018 lbs.

Model 73120T Class 120

63120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 120" stroke
- For 14' to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 951 lbs.

Model 63120T Class 110

74156T

- For trucks with 156" to 180" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 156" stroke
- For 18' and 19' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1085 lbs.

Model 74156T

Front Mount Telescopic

63108T

- For trucks with 102" to 114" CT
- Designed for trucks with 33,000 to 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 108" stroke
- For 10' to 13' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 941 lbs.

Model 63108T Class 100

5384T

- For trucks with 72" to 84" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 10 gallon reservoir
- One 5" 3 stage cylinder 84" stroke
- For 9' to 10' body lengths
- 45 to 50 degree dump angle
- 6" longitudinal recommended
- Weight 664 lbs.

Model 5384T



74135T

- For trucks with 132" to 144" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 135" stroke
- For 16' and 17' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1045 lbs.

Model 74135T Class 120

73120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 3 stage cylinder 120" stroke
- For 14" to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1018 lbs.

Model 73120T Class 120

63120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 120" stroke
- For 14' to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 951 lbs.

Model 63120T Class 110

74156T

- For trucks with 156" to 180" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 156" stroke
- For 18' and 19' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1085 lbs.

Model 74156T

Front Mount Telescopic

63108T

- For trucks with 102" to 114" CT
- Designed for trucks with 33,000 to 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 108" stroke
- For 10' to 13' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 941 lbs.

Model 63108T Class 100

5384T

- For trucks with 72" to 84" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 10 gallon reservoir
- One 5" 3 stage cylinder 84" stroke
- For 9' to 10' body lengths
- 45 to 50 degree dump angle
- 6" longitudinal recommended
- Weight 664 lbs.

Model 5384T



74135T

- For trucks with 132" to 144" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 135" stroke
- For 16' and 17' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1045 lbs.

Model 74135T Class 120

73120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 3 stage cylinder 120" stroke
- For 14" to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1018 lbs.

Model 73120T Class 120

63120T

- For trucks with 108" to 120" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 6" 3 stage cylinder 120" stroke
- For 14' to 15' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 951 lbs.

Model 63120T Class 110

74156T

- For trucks with 156" to 180" CT
- Designed for trucks with 50,000 GVWR
- Direct mount pump
- 26.5 gallon reservoir
- One 7" 4 stage cylinder 156" stroke
- For 18' and 19' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 1085 lbs.

Model 74156T

Twin Telescopic

4250


- For trucks with 102" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 50" stroke
- For 14' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 509 lbs.

Model 42-50 Class F

4265

- For trucks with 120" to 126" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 65" stroke
- For 16' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 537 lbs.

Model 42-65 Class G

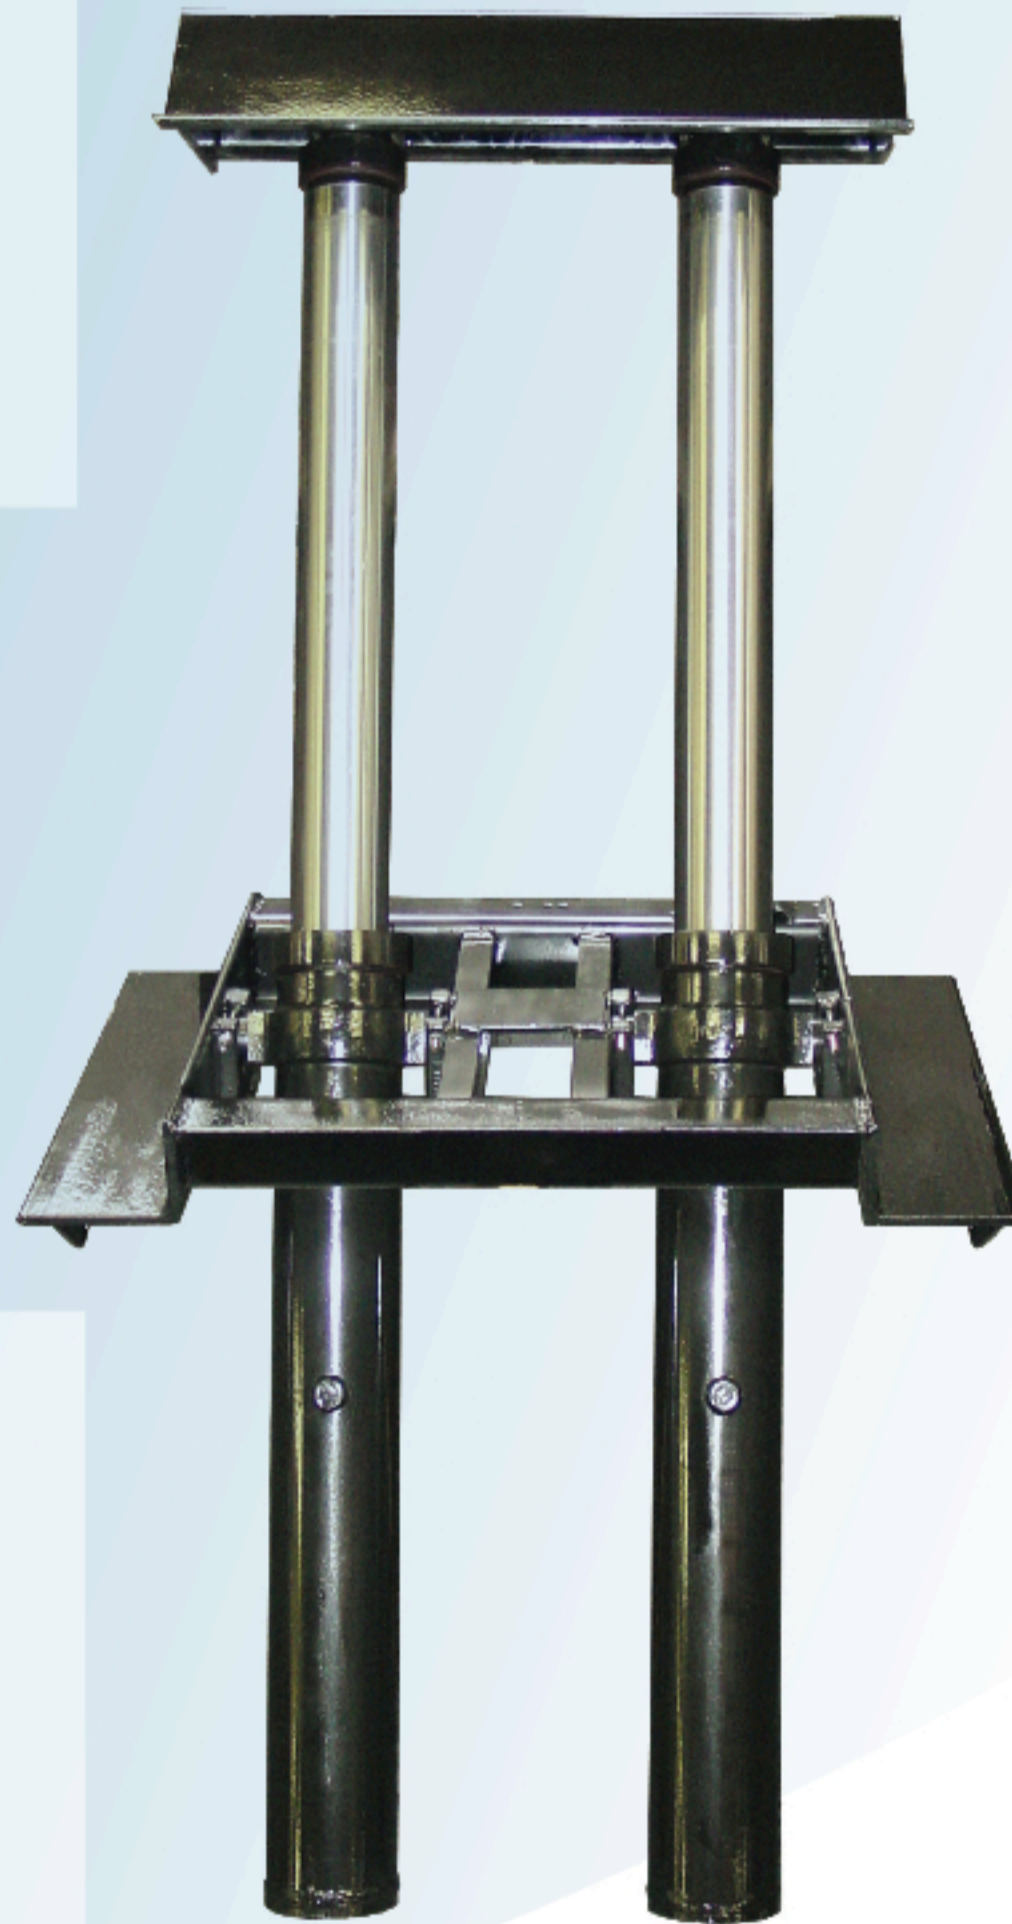

4398

- For trucks with 132" to 168" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 4" 3 stage cylinders 98" stroke
- For 18' to 22' body lengths
- For single axel trucks with
- 45 to 50 degree dump angle
- 7" longitudinal recommended

Model 43-98

5390

- For trucks with 126" to 168" CT
- Designed For trucks with 50,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 5" 3 stage cylinder 90" stroke
- For 18' to 24' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 788 lbs.

Model 53-90

Twin Telescopic

4250


- For trucks with 102" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 50" stroke
- For 14' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 509 lbs.

Model 42-50 Class F

4265

- For trucks with 120" to 126" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 65" stroke
- For 16' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 537 lbs.

Model 42-65 Class G

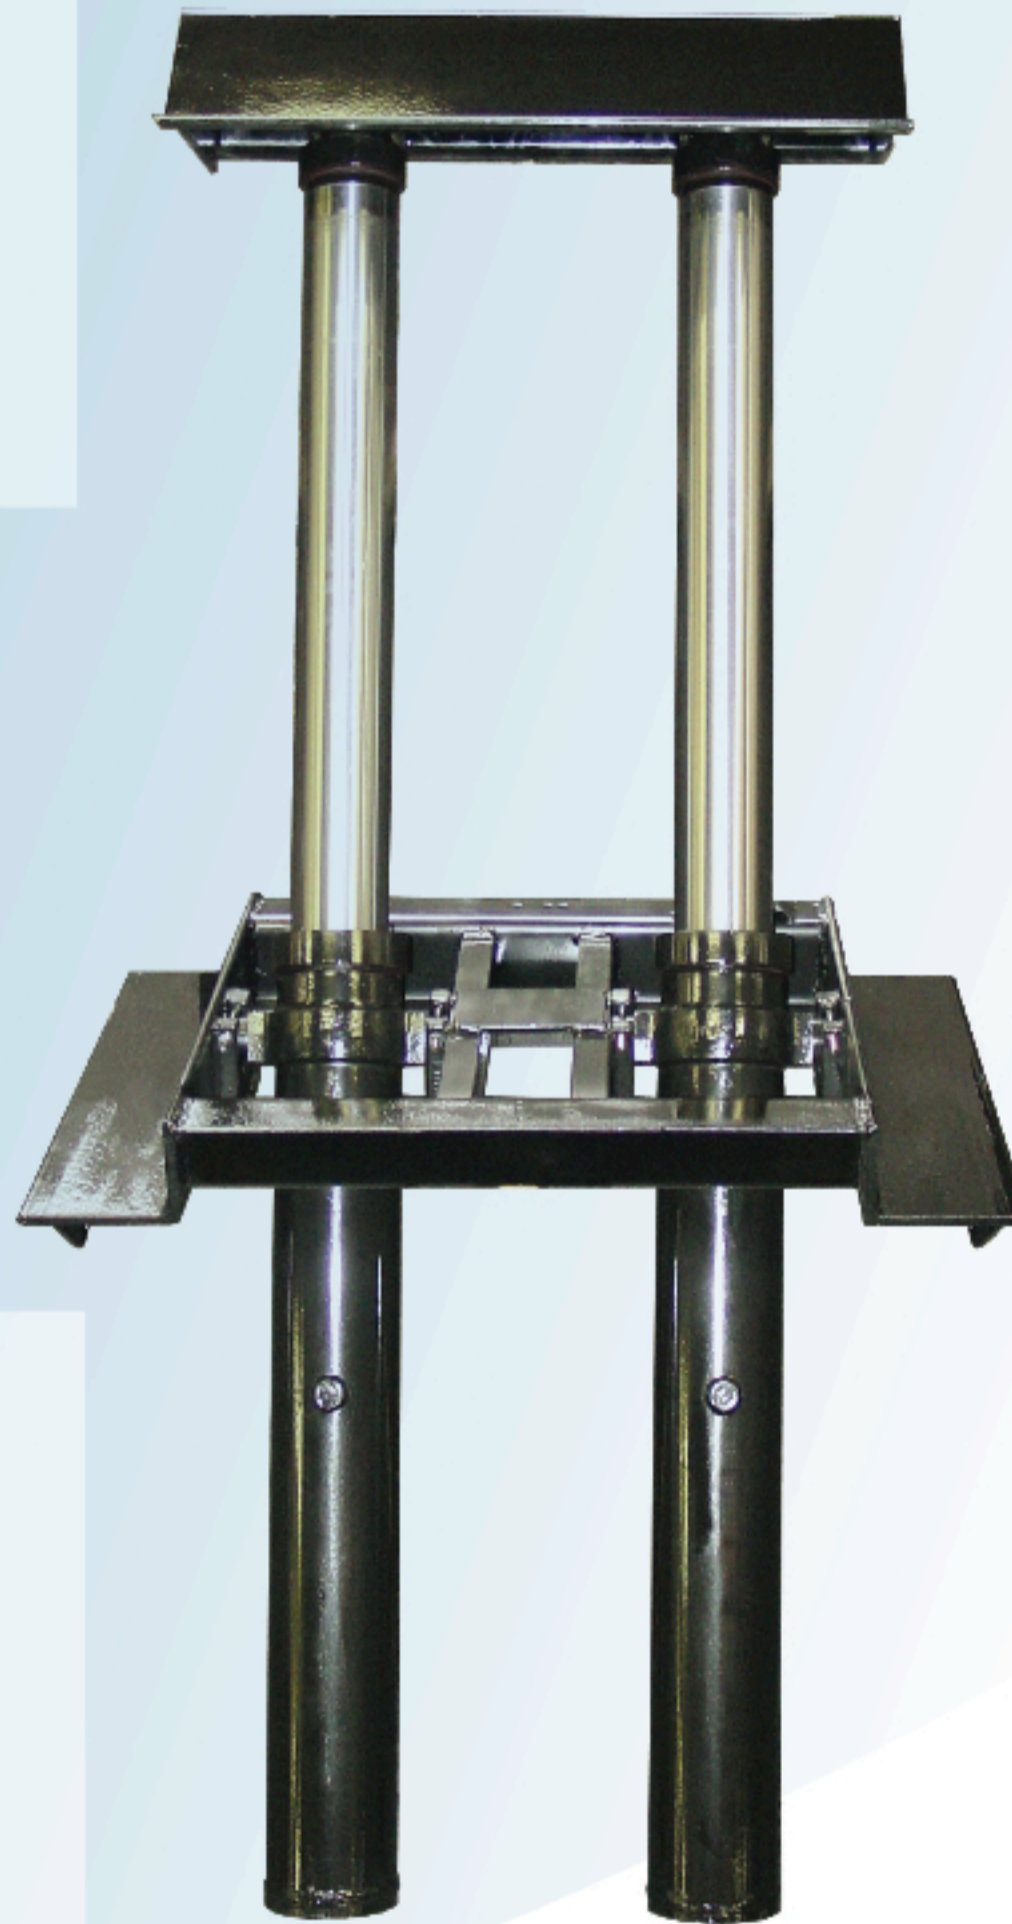

4398

- For trucks with 132" to 168" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 4" 3 stage cylinders 98" stroke
- For 18' to 22' body lengths
- For single axel trucks with
- 45 to 50 degree dump angle
- 7" longitudinal recommended

Model 43-98

5390

- For trucks with 126" to 168" CT
- Designed For trucks with 50,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 5" 3 stage cylinder 90" stroke
- For 18' to 24' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 788 lbs.

Model 53-90

Twin Telescopic

4250


- For trucks with 102" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 50" stroke
- For 14' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 509 lbs.

Model 42-50 Class F

4265

- For trucks with 120" to 126" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 65" stroke
- For 16' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 537 lbs.

Model 42-65 Class G

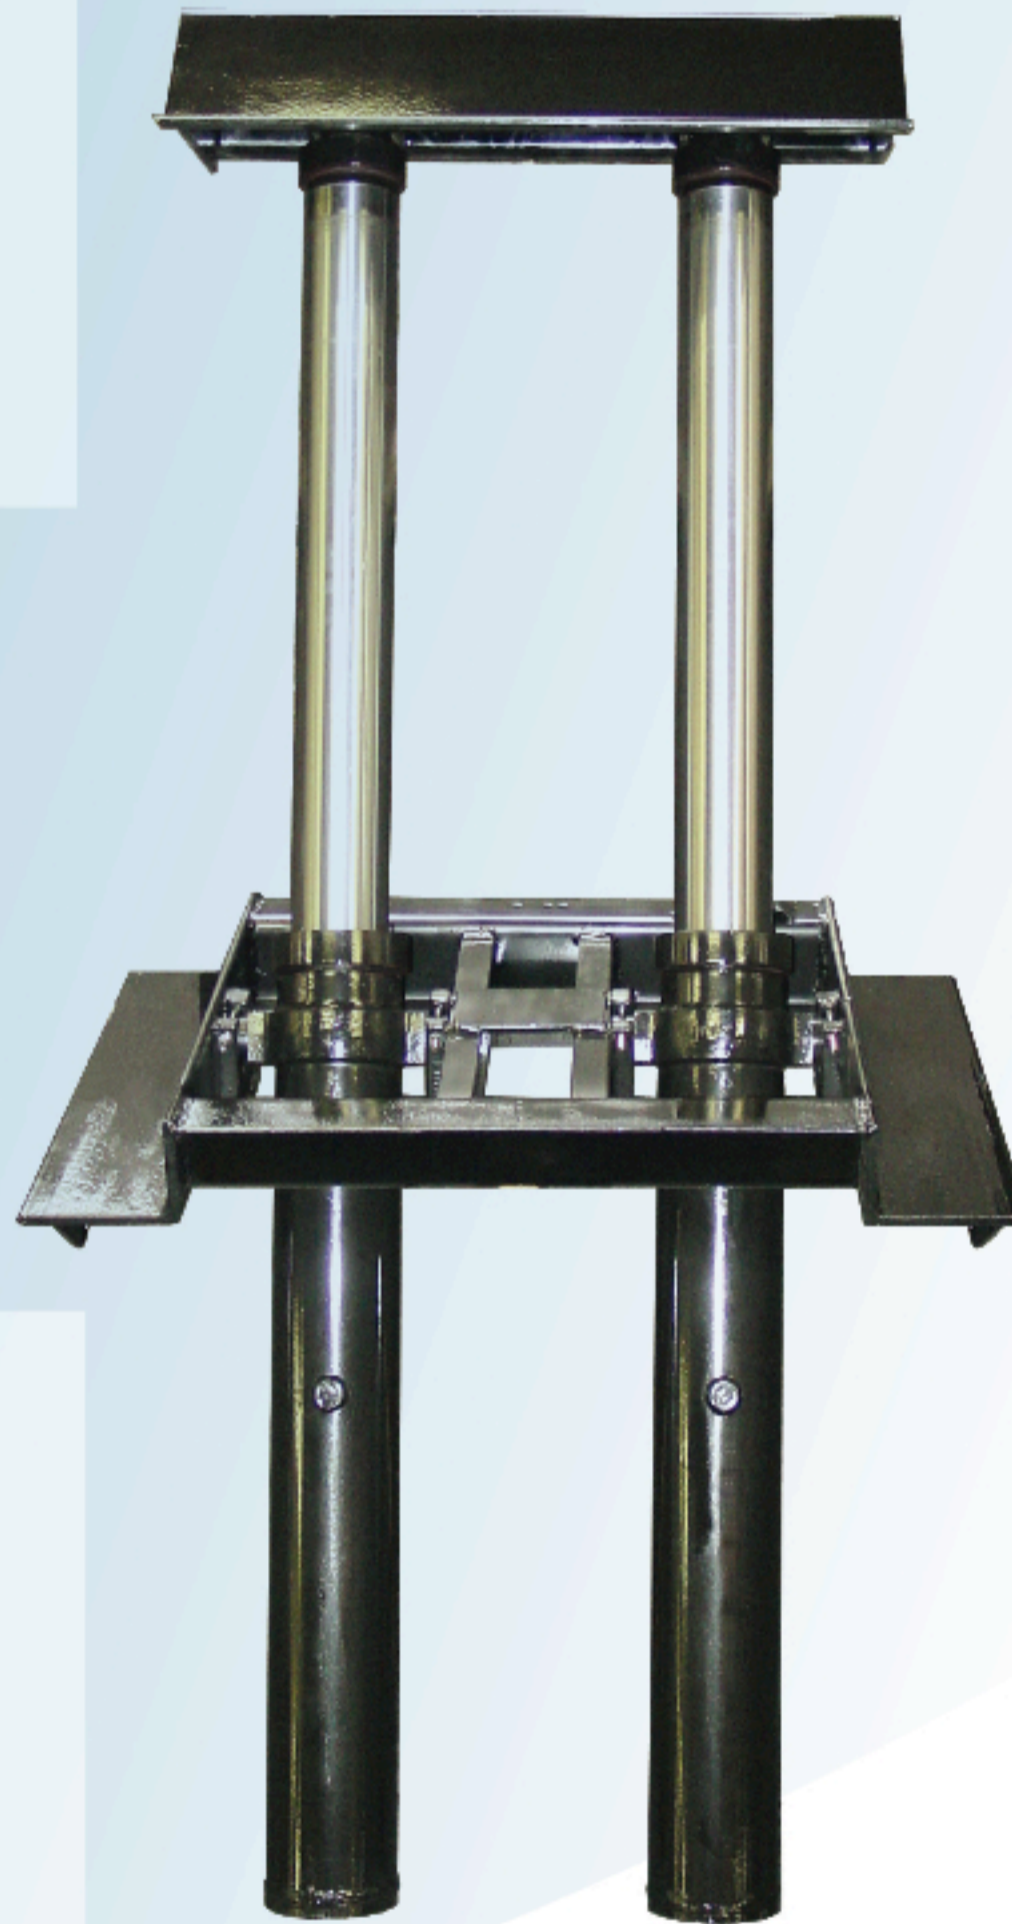

4398

- For trucks with 132" to 168" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 4" 3 stage cylinders 98" stroke
- For 18' to 22' body lengths
- For single axel trucks with
- 45 to 50 degree dump angle
- 7" longitudinal recommended

Model 43-98

5390

- For trucks with 126" to 168" CT
- Designed For trucks with 50,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 5" 3 stage cylinder 90" stroke
- For 18' to 24' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 788 lbs.

Model 53-90

Twin Telescopic

4250


- For trucks with 102" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 50" stroke
- For 14' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 509 lbs.

Model 42-50 Class F

4265

- For trucks with 120" to 126" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 65" stroke
- For 16' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 537 lbs.

Model 42-65 Class G

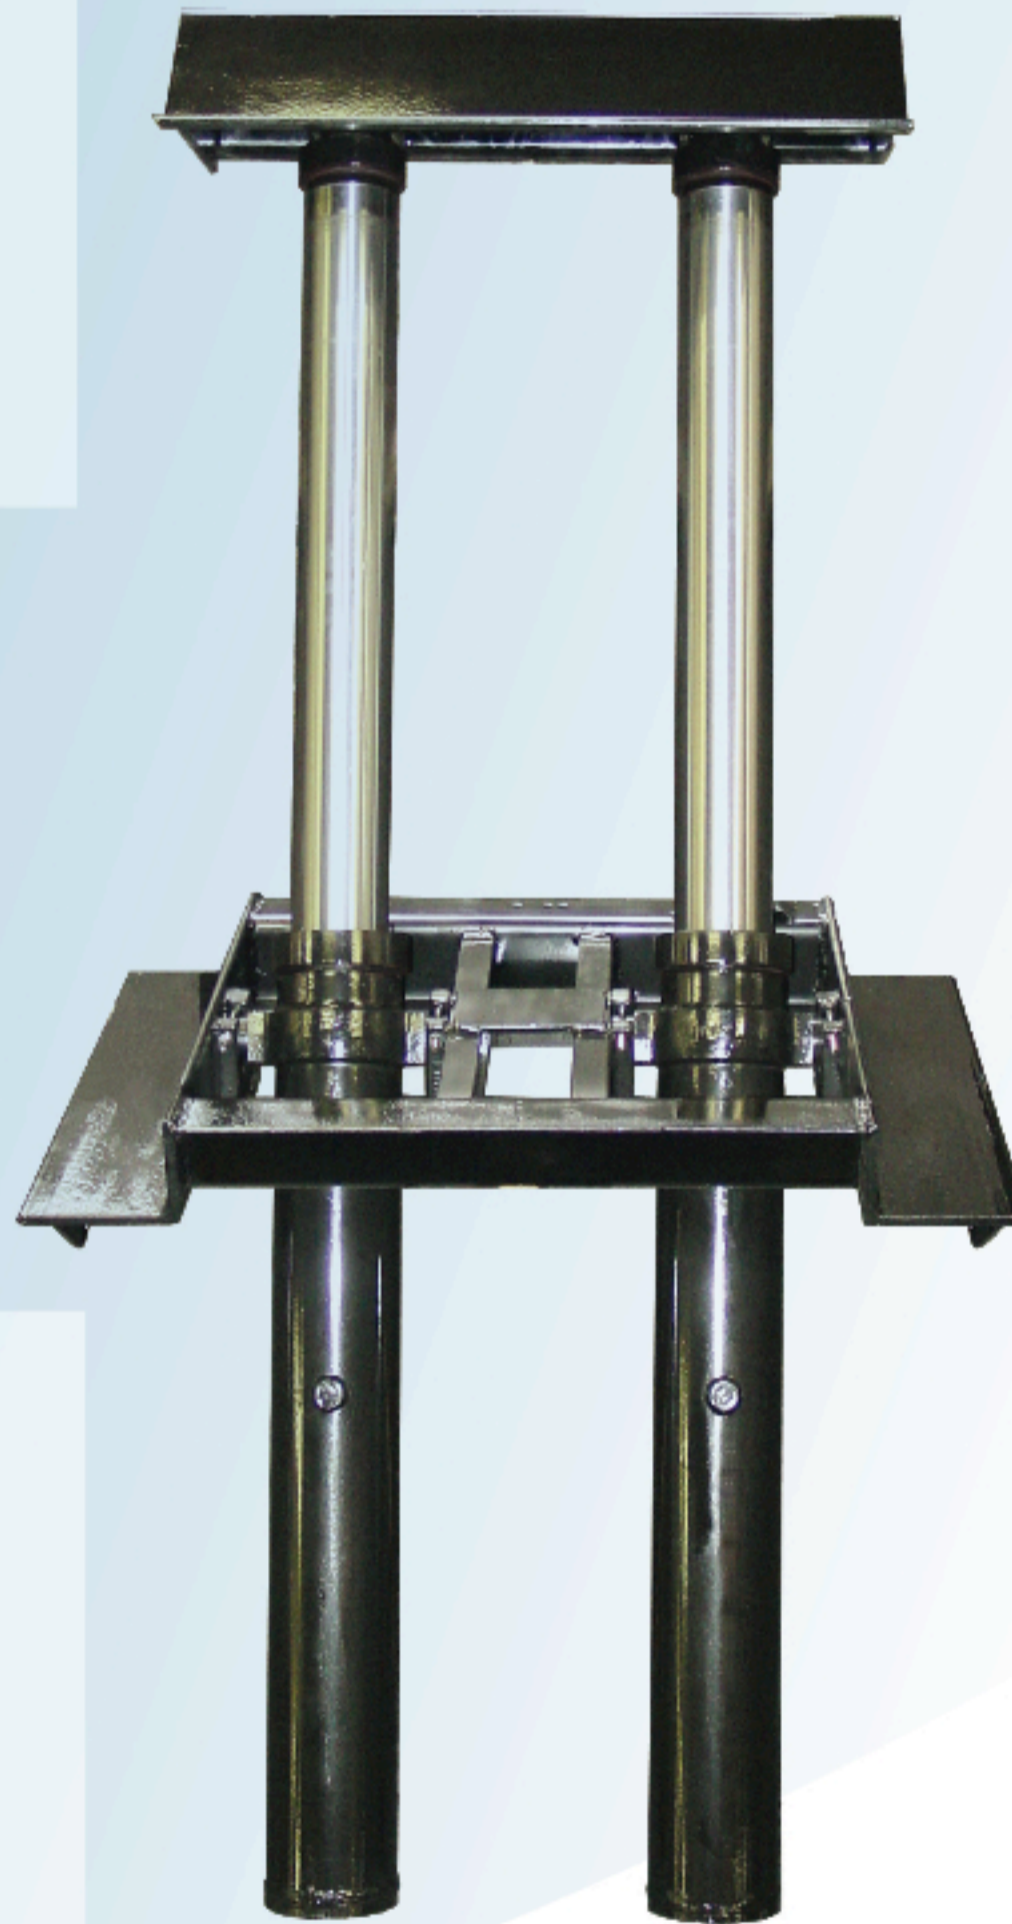

4398

- For trucks with 132" to 168" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 4" 3 stage cylinders 98" stroke
- For 18' to 22' body lengths
- For single axel trucks with
- 45 to 50 degree dump angle
- 7" longitudinal recommended

Model 43-98

5390

- For trucks with 126" to 168" CT
- Designed For trucks with 50,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 5" 3 stage cylinder 90" stroke
- For 18' to 24' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 788 lbs.

Model 53-90