


# TUK-A-WAY® SERIES

## The TE-20 Series

**MAXON®**

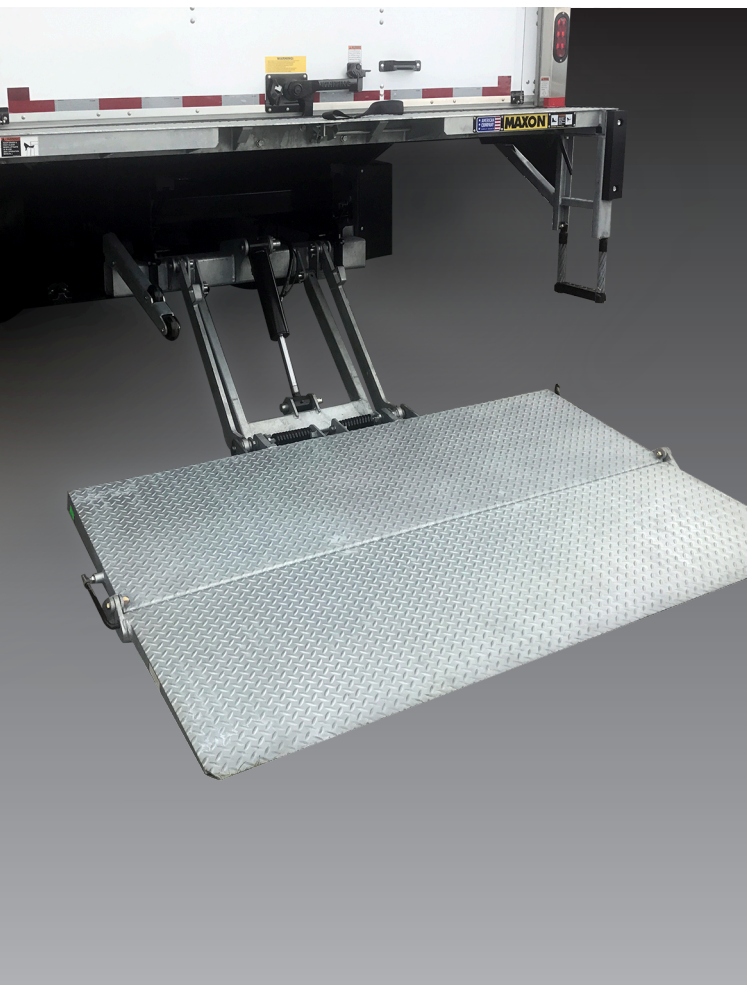



## TE-20 SPECIFICATIONS

The TE-20 Series of Tuk-A-Way® liftgates are the economical choice for general purpose applications requiring 2,000 lbs. lifting capacity. The minimum laden bed height of 36" makes the TE-20 an ideal solution for low bed height applications.

- Center Arm Design
- SmartSpace - gap between extension plate and platform that mitigates a potential pinch point
- Standard Ride
- Low Bed Height Compatible
- 38 Foot Charge Line Kit with a Circuit Breaker

MODEL CAPACITY	WEDGE PLATFORM SIZE	TOTAL WEIGHT	BED HEIGHT
TE-20 (2,000 Lbs.)	36" x 80" (ST) 40" x 80" (AL)	550 lbs. to 585 lbs.	42" Min. w/Body Laden 54" Max. w/Body Unladen
TE-20L (2,000 Lbs.)			36" Min. w/Body Laden 44" Max. w/Body Unladen

ST = Steel  
AL = Aluminum

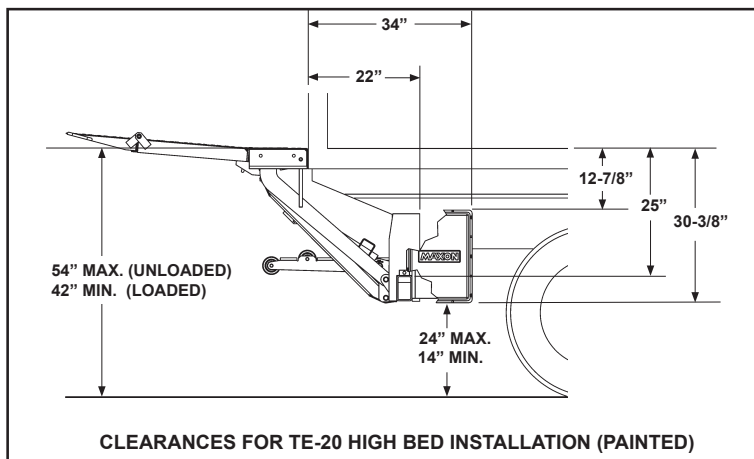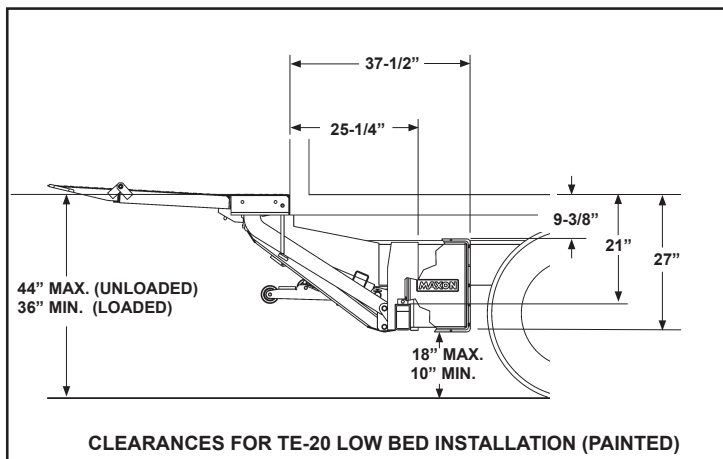

Lift Dimensions and Mounting Requirements

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
800.227.4116 Fax 888.771.7713, [www.maxonlift.com](http://www.maxonlift.com)

# TUK-A-WAY® SERIES


## The TE-20 Series

**MAXON®**


### Optional Features

- Dual Cart Stops
- Bolt-on steps
- Heavy-Duty Dock Bumpers
- Bumper Pads
- MAX ECU® (Electrical Control Unit)
- Street Side Controls
- Power Down
- Galvanized Finish

### Loadable Platform Space with Cart Stops Deployed

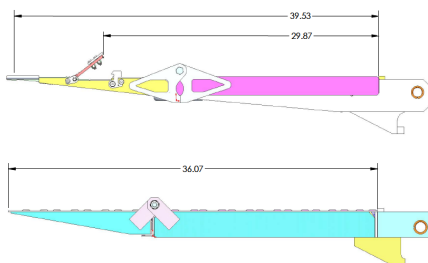


### Distributed by:

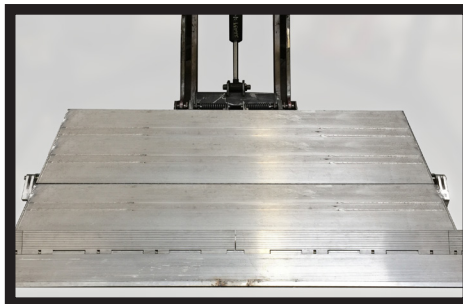

### Large Wedge-Type Platform Design

The TE-20 features large (36"/40"x 80") wedge-type platforms that are available in Steel or Aluminum configurations. The wedge design allows for the smooth transition of load on and off the platform.

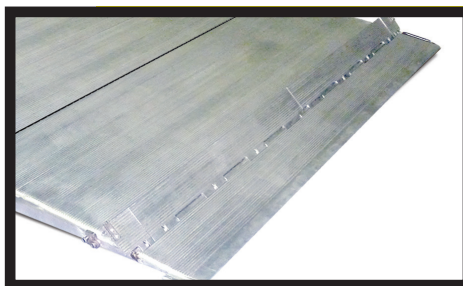

### Dual Cart Stop Options

The Aluminum platforms feature dual cart stops.



### Optional Bolt-On Steps and Extension Plate

The steps and extension plates were strategically designed to bolt-on (option) in order to avoid welding on the gate that would affect the factory paint or galvanized finish. The steps were also designed as an integral part of the gate that would easily allow for them to be exchanged in case of dock damage.



### Grease Fittings Standard

The TE-20 features grease fittings at all critical rotation points.



### MAXPRO® Paint or GALVANIZED Finish

This patented, Maxon exclusive paint process has a tough polyurea top coat and an AL rich primer that combat corrosion and keep the liftgate looking like new for many years. For even more corrosion protection, the TE-20 is also available in a galvanized finish.

M225-0124




Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
800.227.4116 Fax 888.771.7713, [www.maxonlift.com](http://www.maxonlift.com)

# TUK-A-WAY® SERIES

## The TE-25/TE-30 Series


**MAXON®**

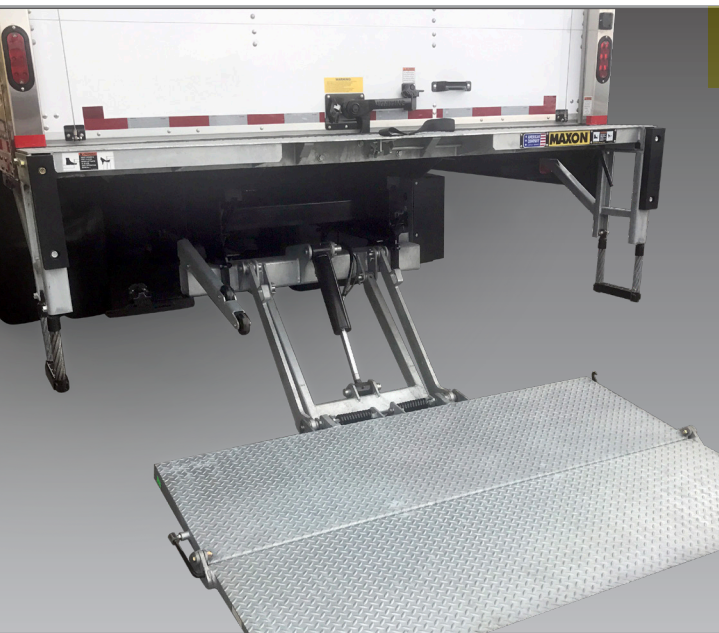


### TE-25/TE-30 SPECIFICATIONS

**MAXON's brand new TE-25/TE-30 liftgate models have taken "standard" to a whole new level. The 2,500 lbs or 3,000 lbs, medium-duty, Tuk-A-Ways deliver premium features in a standard tuk**

- Powerful liftgate in an economic package
- SmartSpace - gap between extension plate and platform that mitigates a potential pinch point
- Steel or Aluminum platforms
- Painted or optional galvanized
- Galvanized versions feature bolt-on mount plates
- Weld-on as well as bolt-on step options
- Low bedheight versions
- Grease fittings at all critical rotation points

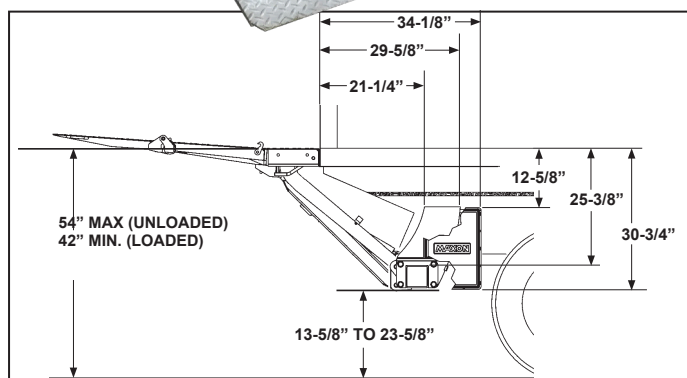

TE-25/TE-30 Lift Dimensions and Mounting Requirements

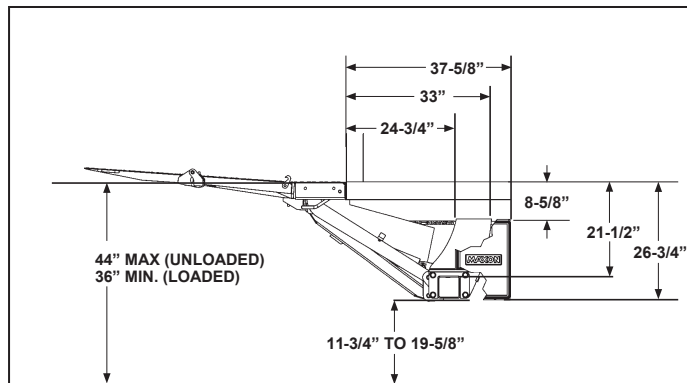

TE-25L/TE-30L Lift Dimensions and Mounting Requirements

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fit.

ST = Steel  
AL = Aluminum

MODEL CAPACITY	PLATFORM SIZE	TOTAL WEIGHT	BED HEIGHT
TE-25 (2,500 Lbs.)	36" x 80" (ST) 48" x 80" (ST)	555 lbs. to 655 lbs.	42" Min. w/Body Laden 54" Max. w/Body Unladen
TE-30 (3,000 Lbs.)	48" x 80" (AL/AL) 52" x 80" (AL/AL)		
TE-25L (2,500 Lbs.)	36" x 80" (ST)	585 lbs. to 685 lbs.	36" Min. w/Body Laden 44" Max. w/Body Unladen
TE-30L (3,000 Lbs.)	48" x 80" (ST)		38" Min. w/Body Laden 44" Max. w/Body Unladen
	48" x 80" (AL/AL)		38" Min. w/Body Laden 44" Max. w/Body Unladen



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
800.227.4116 Fax 888.771.7713 [www.maxonlift.com](http://www.maxonlift.com)



# TUK-A-WAY® SERIES


## The TE-25/TE-30 Series

**MAXON®**


### Optional Features

- Bolt-on steps
- Hand held control
- MAX ECU® (Electrical Control Unit)
- Cab Cut-off switch
- Power down
- Dual Cart stops
- Galvanized finish

### Loadable Platform Space with Cart Stops Deployed




**Distributed by:**

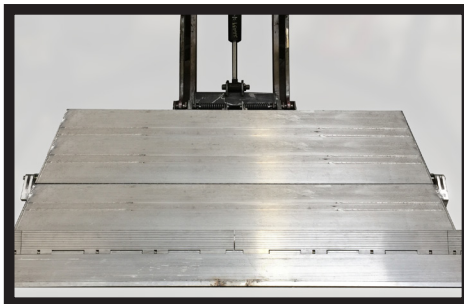

### Large Wedge-Type Platform Design

The TE-25/TE-30 features large (36"/48"/52" x 80") wedge-type platforms that are available in Steel or Aluminum/Aluminum configurations. The wedge design allows for the smooth transition of load on and off the platform.

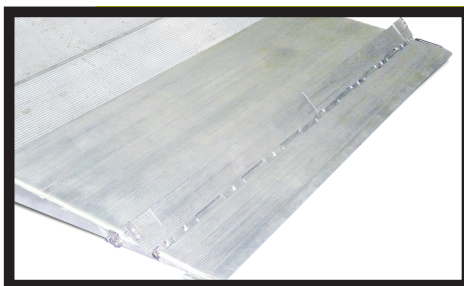

### Dual Cart Stop Options

The Aluminum/Aluminum platforms feature dual cart stops.



### Optional Bolt-On Steps and Extension Plate

The steps and extension plates were strategically designed to bolt-on (option) in order to avoid welding on the gate that would affect the factory paint or galvanized finish. The steps were also designed as an integral part of the gate that would easily allow for them to be exchanged in case of dock damage.



### Grease Fittings Standard

The TE-25/TE-30 feature grease fittings at all critical rotation points.



### MAXPRO® Paint or GALVANIZED Finish

This patented, Maxon exclusive paint process has a tough polyurea top coat and an AL rich primer that combat corrosion and keep the liftgate looking like new. For even more corrosion protection, the TE-25/TE30 are also available in a galvanized finish.

M-220-1223



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
800.227.4116 Fax 888.771.7713 www.maxonlift.com

# TUK-A-WAY® SERIES

## The TE-33 Series


**MAXON®**



## TE-33 SPECIFICATIONS

**MAXON's TE-33 liftgate model has taken "standard" to a whole new level. The 3,300 lb, medium-duty, Tuk-A-Way® delivers premium features in a standard tuk.**

- Steel or Aluminum platforms
- SmartSpace - gap between extension plate and platform that mitigates a potential pinch point
- Bolted-on extension plate and steps
- Hydraulic locking
- Grease fittings at all critical rotation points
- Low bed height as well as walk ramp ready models available

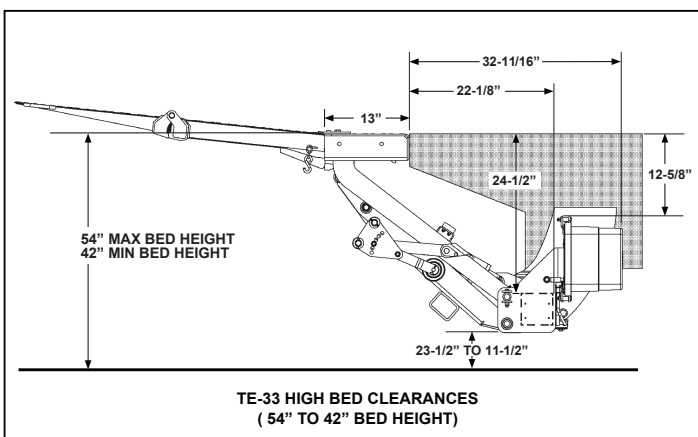

Lift Dimensions and Mounting Requirements  
Refer to install manual for TE-33 L

MODEL	CAPACITY	PLATFORM SIZE	TOTAL WEIGHT	BED HEIGHT
TE-33	3,300 Lbs.	48" x 84" ST, AL/AL	990 Lbs - ST 900 AL/AL	42" Min. Laden
		52" x 84" ST, AL/AL	1,020 Lbs - ST 930 AL/AL	54" Max. Unladen
TE-33 L		48" x 84" ST, AL/AL	990 Lbs - ST 900 AL/AL	38" Min. Laden 44" Max. Unladen
		52" x 84" ST, AL/AL	1,020 Lbs - ST 930 AL/AL	40" Min. Laden 44" Max. Unladen
TE-33 WR		48" x 84" ST, AL/AL	990 Lbs - ST 900 AL/AL	44" Min. Laden 54" Max. Unladen
		52" x 84" ST, AL/AL	1,020 Lbs - ST 930 AL/AL	46" Min. Laden 54" Max. Unladen

"L" - Low bed height models  
 "WR" - Walk ramp models  
 "ST" - Steel  
 "AL" - Aluminum

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
 800.227.4116 Fax 888.771.7713, [www.maxonlift.com](http://www.maxonlift.com)

# TUK-A-WAY® SERIES



## The TE-33 Series

**MAXON®**

### Optional Features

- Hand held control
- MAX ECU® (Electrical Control Unit)
- Cab Cut-off
- Power down
- Dual Cart stops
- Galvanized finish

### Loadable Platform Space with Cart Stops Deployed

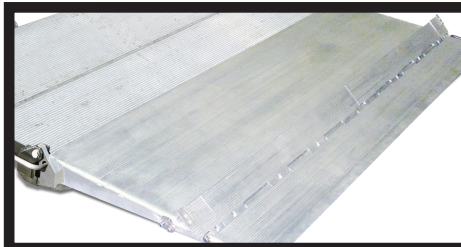

### Large Wedge-Type Platform Design

The TE-33 features large 48" x 84" and 52" x 84" wedge-type steel or aluminum/aluminum platforms. The AL/AL platforms come optional with dual cart stops. The wedge design allows smooth transition of load on and off the platform.



### Twin Cylinder Design

The TE-33 features a twin cylinder, mid-arm design resulting in great performance and stability.



### Hydraulic Locking

The TE-33 features a hydraulic lock valve that takes operator involvement out of the equation. As soon as the control button is released the gate is always securely locked.



### Bolt-On Steps & Extension Plate

The steps and extension plates were strategically designed to bolt-on in order to avoid welding on the gate that would affect the factory paint. The steps were also designed as an integral part of the gate that would easily allow for them to be exchanged in case of dock damage.



### Aluminum Platform MAX GRIP® STANDARD

Lightweight aluminum platform design with recessed hinges provides a flat loading surface over entire width of platform. The platform features MAXGRIP® (knurled platform surface) and dual assist torsion springs that minimize the opening and closing force.

Distributed by:

M-194-1223



### MAXPRO® Paint or GALVANIZED Finish

This patented, Maxon exclusive paint process has a tough polyurea top coat and an AL rich primer that combat corrosion and keep the liftgate looking like new. For even more corrosion protection, the TE-33 is also available in a galvanized finish.

Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
800.227.4116 Fax 888.771.7713, [www.maxonlift.com](http://www.maxonlift.com)