400U_{Smooth} Side Dump Body

A continued tradition since the early 1900's



Tough & Versatile

The Galion 400U smooth side body is especially designed for heavy-duty hauling requirements. It is well-suited for construction work, aggregate hauling and bucket loading. All units are built of tough high tensile steel to virtually outlast and outperform all others. Recommended for single axle underbody hoist applications.








- Horizontal pressed V-brace sides
- Material-shedding boxed top rails
- 9" floor to side radius
- 8 gauge construction throughout, 10' long
- Double acting tailgate hardware
- 6-panel tailgate
- Tarp-friendly upper gate hardware
- Full-depth rear corner posts

Visit Galion and all affiliated companies on the world wide web. www.galiongodwin.com

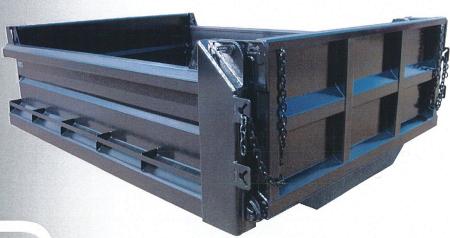

A 24" cab protector is optional equipment on the 400U Smooth Side

A Smooth Side



400U Smooth Side Specifications:

General Dimensions:

Available in 10' inside length, 86" inside width, 26" sides, 32" or 36" ends.

Sides:

8 gauge high tensile steel with material shedding boxed top rails, full depth 15" rear corner post, one intermediate, formed in place horizontal "V" brace, 6" or 10" front and rear board extension pockets and full length tarp rails.

Floor:

8 gauge high tensile steel with 9" floor to side radius.

Front Bulkead:

8 gauge high tensile steel construction with two bend top flange and one formed in place intermediate "V" brace.

Tailgate:

8 gauge high tensile steel, 6 panel design with full perimeter box bracing, two intermediate vertical braces and one intermediate horizontal brace, double acting design with long chains and two sets of banjo eyes and full width lower tailgate pin.

Tailgate Hardware:

Heavy duty cast "tarp friendly" top hardware and cast overshot lower hardware and manual release handle.

Lights:

Meets all requirements of FMVSS108 with oval stop/tail/turn lights recessed in rear post. All lighting is recessed, shock mounted, complete with factory wiring harness.

Understructure:

Stacked design utilizing 6" structural lonitudinals gusseted to 4" structural channel crossmembers on 12" centers, lubricated front and rear cross shafts and full width rear bolster.

Safety Features:

All Galion 400U Smooth Side bodies are shipped with a "body up" warninglight and OSHA required back up alarm.

Options:

9' body Coal door in gate

Air tailgate

FULL FACTORY WARRANTY complete parts and service available through nationwide authorized distributors

Additional light holes

Bolt on spreader apron

L.E.D. lighting ILO incandescent

Cast HD quick release top hardware

Barn door tailgate ILO double acting

Other gauges, material types and understructures available Various cab protectors (sleek, widths to 90", long version)



Pictured is a close view of the upper tarp friendly hardware of the standard 400USS body. This hardware makes it easy to quickly remove and reinstall the tailgate as needed



Pictured is a close view of the full-depth rear corner post with double chain adjusters and 8 gauge high tensile steel rear bolster.

Galion-Godwin Truck Body Co. LLC. 7415 Peabody-Kent Rd. Winesburg OH. 44690 P.O. Box 208 (877) 450- 4794 Fax (330) 359-5660



CLIFFSIDE BODY CORPORATION

P.O. Box 206 130 Broad Avenue FAIRVIEW, NEW JERSEY 07022 (201) 945-3970