

**ANTHONY**  
LIFTGATES, INC.®


**AR**



\*Shown with optional features.

## RAILTRAC™ SERIES

LIFTING CAPACITIES (LBS): 1200, 1800, 2500

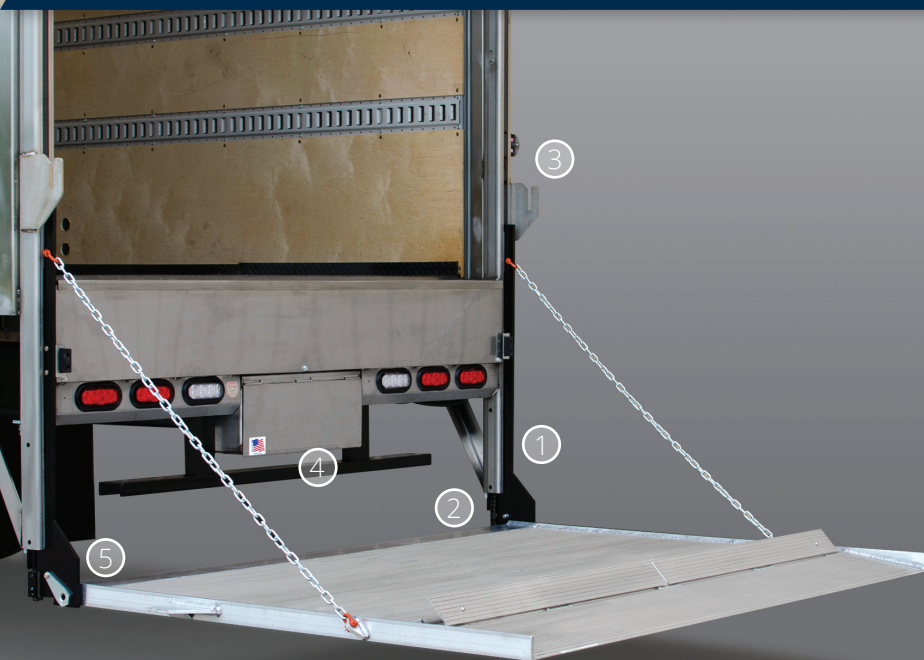

## KEY ADVANTAGES

- 1. Lifetime-Warranty Sliders**  
Maintenance-free. No costly rollers or bearings to replace.
- 2. Lifetime-Warranty Service Free Bushings**  
Used at all critical pivot points to reduce wear without the need for routine lubrication.
- 3. EZ Mount**  
Ships factory assembled, filled, and tested for easy installation. Switches are pre-mounted & wired.
- 4. CHS - Centralized Hydraulics System**  
All sensitive hydraulic and electrical components housed safely within the pump box.
- 5. Spring Assist Open/Close**  
Springs assist provides lightweight platform operation.

**QUALITY, RELIABILITY, CUSTOMER SERVICE**

**MADE IN THE USA** 

# STANDARD FEATURES

- **Durable Roller Chain Drive**  
Proven and compact drive system.
- **Industry Leading Warranty**  
2 years mechanical + 2 years electrical & hydraulic, parts and labor.
- **Marine Duty Potted Toggle Switch**  
Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **Pressure Compensated Flow Valve**  
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Circuit Protection**  
200 Amp fuse protects truck wiring from a "dead short".
- **Level Ride Platform**  
Platform remains level throughout the lift cycle.
- **Anthony 3-Step Powder Coat**  
Steel components are washed, shot blast prepped, and coated with premium finish.

## QUALITY COMES STANDARD

### AVAILABLE MODELS, PLATFORMS AND CAPACITIES

Model	AR-1200	AR-1800	AR-2500
Capacity (lbs)	1200	1800	2500
Bed Height Range	28" - 58"		
Model Width	Platform Width		
90" (92" Body)	86"		
94" (96" Body)	90"		
100" (102" Body)	96"		
Available Platforms (Load Depth + Ramp)			
Single Piece Steel + Fixed Ramp (Standard**)	36" or 42" + 6"		
Single Piece Steel + ARR (Standard**)	36" or 42" + 12"		
Single Piece Alum + Fixed Ramp	33", 39", 44", 50", 55", 60" + 12"		
Single Piece Alum + ARR	33", 39", 44", 50", 55", 60" + 12"		
Model	AR-1800-RT	AR-2500-RT	
Capacity (lbs)	1800	2500	
Bed Height Range	44" - 58"		
Available Platforms (Load Depth + Ramp)			
Two Piece Steel + Fixed Ramp	42" + 6"		


\*ARR = Flip-up Aluminum Retention Ramp. 78" Wide models also available.

\*\*36" steel platform standard on AR-1200/1800. 42" steel platform standard on AR-2500.

### OPTIONS

- Above Bed Option
- Galvanized Finish
- Stainless Steel Frame
- Cart Stops - Available for Aluminum Platform Models
- Wireless, removable handheld corded, flush mount, or dual control options.
- Stainless steel toggle switch guard
- Cab or ignition cut-off switch
- Taillight kits
- Custom platforms

### TRUCK MOUNTING REQUIREMENTS

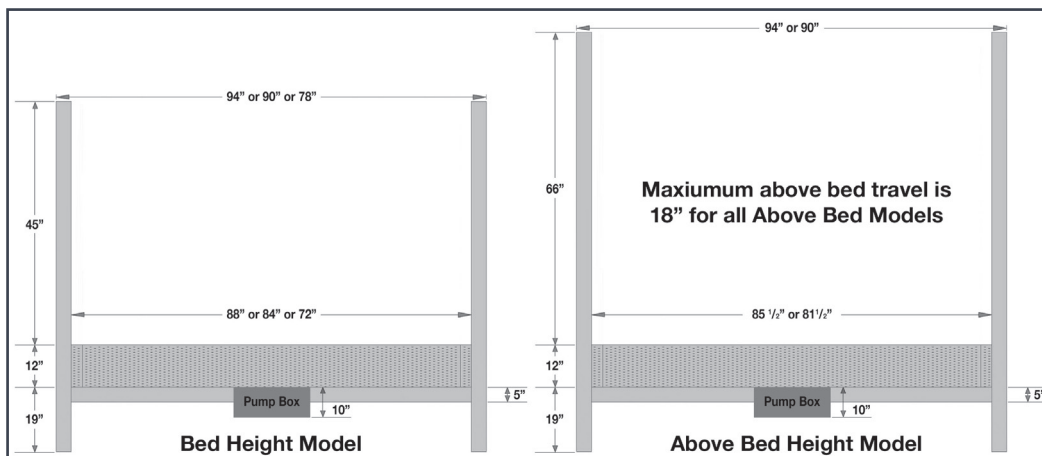

### Anthony Liftgates, Inc.

1037 W. Howard Street  
P.O. Box 615  
Pontiac, IL 61764-0615

**Phone:** 815.842.3383

**Fax:** 815.844.3612

**Toll Free:** 800.482.0003

**www.anthonyliftgates.com**