
ILK CANTILEVER LIFT 1800 lbs. Capacity



WIDE ARM CANTILEVER FOR IMPORT AND DOMESTIC CUTAWAY CHASSIS



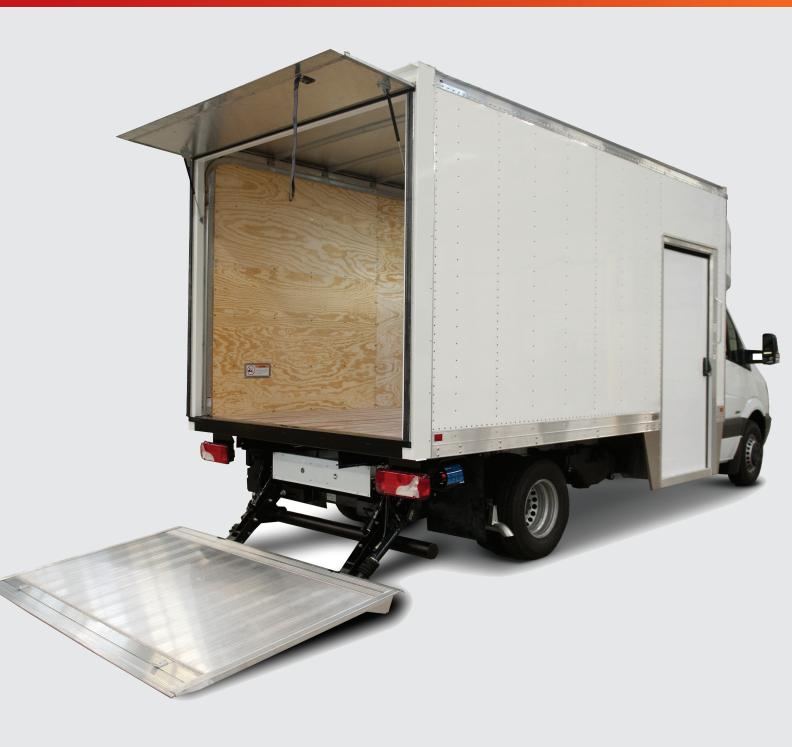

WWW. PALFINGER.COM

OPTIMIZED CONSTRUCTION

- » Bushings and zerks at all pivot points
- » Ground rollers on platform
- » Single piece rear impact guard
- » Thermo protected PowerPack pre-installed, wired and filled with high-grade hydraulic fluid
- » 105 degree tilting platform maintains level through operation
- » Bolt-on application for most applications

STANDARD | SAFETY FEATURES

- » (4) Cylinder design with hydraulic locks on cylinder ports
- » Cab shut off switch
- » 150 AMP circuit breaker
- Solid state, programmable control system offers improved operation and fast installations
- » True level ride with ground tilt
- » Low maintenance bushings
- » Cart stops
- » Aluminum platform
- » Warning lights
- » Hand held remotes

LIFTGATE OPTIONS

- » Flip up door
- » Foot controls
- » Auxilary truck kit
- » Custom made platforms
- » Swing door kit



HIGHLIGHTS

- » Our wide lift arms clears pintle hitches and allows installation on wide (42") frames with no, or slight, modifications.
- Mount frames are equipped with a single piece rear impact guard. Electrical system is pre-wired and the lift is filled with multi temp hydraulic fluid to insure a fast quality installation.
- The stout construction together with the (4) cylinder hydraulic system coupled with cylinder locks placed directly at the port, restricts hydraulic pressure to only the cylinder. These features provide additional stability and safety for the operation at the lightest possible weight of 450 lbs.

AUTOMATIC LEVELING

The added convenience of automatic leveling allows the platform to find horizontal position on its own as well as tilt down at the ground only if the operator is still activating the controls. With this feature, the operator does not need to adjust the tilt angle manually.

LIFTGATE CONTROLS

Lockable control boxes are pre-wired and tested. We offer (3) different control stations:

- » Side Control
- » Hand held remote
- » Optional foot controls in the liftgate platform



LARGE GROUND ROLLER

Our large ground roller eliminates wear on clevis and platform components when platform touches the ground maximizing your investment by reducing maintenance costs.



POWERPACK

The pre-mounted PowerPack is fully enclosed for fast installation. Oversized and thermo-protected quality components minimize maintenance and down time.

lodel	Lifting Capacity	Platform Length	Platform Width	Bed Height	Approx. Weight Mount Clearance	
	(lbs.)	(Inches)	(Inches)	(Inches)	(lbs.)	(Inches)
K 18	1800	60	94	28" - 42"	450	26 - 35

Products shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.